

2021

Structural Characterization and Synthesis of ZnO / TiO₂ Nano Composites

Shima Mirabean

Department of physics, Bu-Ali Sina University, Hamedan, Iran, kiani1331@gmail.com

Maryam Kiani

Department of physics, Bu-Ali Sina University, Hamedan, Iran, kiani1331@gmail.com

Feridoun Samavat

Department of physics, Bu-Ali Sina University, Hamedan, Iran, kiani1331@gmail.com

Follow this and additional works at: <https://digitalcommons.aaru.edu.ijtfst>

Recommended Citation

Mirabean, Shima; Kiani, Maryam; and Samavat, Feridoun (2021) "Structural Characterization and Synthesis of ZnO / TiO₂ Nano Composites," *International Journal of Thin Film Science and Technology*. Vol. 10 : Iss. 3 , Article 7.

Available at: <https://digitalcommons.aaru.edu.ijtfst/vol10/iss3/7>

This Article is brought to you for free and open access by Arab Journals Platform. It has been accepted for inclusion in International Journal of Thin Film Science and Technology by an authorized editor. The journal is hosted on [Digital Commons](#), an Elsevier platform. For more information, please contact rakan@aar.edu.jo, marah@aar.edu.jo, u.murad@aar.edu.jo.

Structural Characterization and Synthesis of ZnO / TiO₂ Nano Composites

Shima Mirabean, Maryam Kiani* and Feridoun Samavat

Department of physics, Bu-Ali Sina University, Hamedan, Iran

Received: 21 Mar. 2021, Revised: 22 Apr. 2021, Accepted: 24 Jun. 2021.

Published online: 1 Sep. 2021.

Abstract: Titanium dioxide (TiO₂) has many characteristics such as strong oxidation state, biocompatibility and acceptable mechanical properties; TiO₂ is among the materials that are frequently used in biological and medical applications. Nowadays, increasing efficiency of titanium dioxide involves doping it with elements such as silver, zinc and iron and is being favored. In this study, nanoparticles of TiO₂ with ZnO were synthesized by the impregnation method. ZnO nanoparticles were impregnated with different concentrations of TiO₂ and the result was compared and evaluated. In order to identify the present phases in the structure, X-ray diffraction analysis was used. Also for the characterization of the nanocomposites Field Emission Scanning Electron Microscope (FESEM), Ultraviolet-visible spectroscopy (UV-Vis), Fourier-transform infrared spectroscopy (FTIR), and were used. The results showed that impregnation method could successfully produce Nanocomposites of ZnO-TiO₂ with the expected combination.

Keywords: Titanium dioxide, Zinc, Emission Scanning Electron Microscope (FESEM), Ultraviolet-visible spectroscopy (UV-Vis), Fourier-transform infrared spectroscopy (FTIR), solar cells, Structural characterization, nanometer ZnO/TiO₂ composite powder, composite structure of nano-TiO₂.

1 Introduction

Titanium dioxide is an important photo-catalysis material. Its characters include the high activity in photo-catalyzing organic materials, stability in chemical property, bearing the chemical and photochemical erosion and non-toxicity. It has great potential in disposing of sewage, purifying the air, etc. [1-3]. However, titanium dioxide is wide-gap material, it only absorbs the ultraviolet light part of the solar spectrum and the efficiency of using solar energy is low so that its applications are limited.

Using the coupling between Nano-particles can increase the efficiency of using solar energy to a great extent and increase the speed and efficiency of photo-catalyzing organic matters. The Nano-composition and developing new techniques for it becomes a hot spot in this field. Nano-ZnO and TiO₂ are important in the research of nanometer materials field. They have good performance and wide applications in optics and photo-electrochemistry [5, 6]. Documents show that nanometer ZnO/TiO₂ composite powder has great scattering power for visible light of 400-700 nm and has great abilities to absorb the ultraviolet radiation of 200-350 in the spectrum. So that it has great ability to prevent ultraviolet radiation and it improves a lot compared with sole-functioned nanometer

ZnO and TiO₂ powder [7, 8].

The purpose of this article is to look for simple ways and techniques to prepare Nano-ZnO and the composite structure of nano-TiO₂ to provider a wider basis for the research of its performances in the future. We used X-ray diffraction, transmission electron microscope etc. to characterize the phase and appearance and analyses the performance of the products.

2 Experimental Section

2.1 Synthesis of ZnO/TiO₂ nanocomposites

In this experiment, different material concentrations of non-composite material of ZnO/TiO₂ is synthesized and then after preparing their dough, they used in solar cells. Zn (NO₃)₂·6H₂O with 99.8% purity was received from Fisher Scientific in powder form. Commercial anatase TiO₂ (98%) was purchased from Acros Organics and utilized as a support for the synthesis of ZnO/TiO₂ composite. All chemicals were used without further modifications. Deionized water that was used in the composite synthesis was obtained from the laboratory. Wet incipient wetness impregnation method was used for the synthesis of ZnO/TiO₂ composite to achieve the higher loading of ZnO

*Corresponding author E-mail: philominathan@gmail.com

on the surface of commercial anatase TiO₂ support 1.36 g of Zn (NO₃)₂·6H₂O was dissolved in 2 mL of deionized water for preparation of 3%ZnO/TiO₂ composite. A homogenous mixture of this solution was obtained by stirring it for 30 min with an electromagnetic stirrer at room temperature. Meanwhile, 10 g of TiO₂ with an average diameter of 200 nm was dried at 200 C for 1 h. The dried TiO₂ was further immersed into the Zn solution and mixed vigorously with a stirrer for 15 min to achieve a homogenous absorption of Zn solution over the surface of TiO₂. The ZnO/TiO₂ composite was aged at 110 C for 24 h inside an oven. The synthesized composite was then calcined at 400 C for 5 h with a ramp of 4 C/min by using a muffle furnace for removal of metal counter ions and adsorbed water in the prepared composite. Finally, the calcined sample was stored in a sample bottle for further use in DSSCs. Similarly, 2.27 g and 4.56 g of Zn (NO₃)₂·6H₂O was used for the synthesis of 5%ZnO/TiO₂, and 10%ZnO/TiO₂ composites, respectively.

2.2 Characterization of ZnO/TiO₂ composites

After preparing intended Nanocomposites, analysis has been done for comparing of synthesized Nanocomposite with industrial TiO₂ power that is, X-ray diffraction (XRD), field-emission-scanning-electron-microscopy (FE-SEM), Ultraviolet-visible spectroscopy (UV-Vis) and Fourier-transform infrared spectroscopy (FTIR) analyses.

Instruments used for morphology character finding of the level has been done using an electronic scanning microscope of field development (FE-SEM), made by TESCAN Company and pyro symmetry of absorption by BETBELSORPMINI Instrument.

Characterization of the structure was done with the use of x-ray diffraction STOE-IPDS 2T diffractometer. Optic characterization composed of ultraviolet and seen absorb spectrum in room temperature by Spectrophotometer with ocean optics HR 4000 spectrometer and infrared spectroscopy has been done by FTIR WQF-51OFT- IR spectrometer.

3 Results and Discussion

3.1 X-ray diffraction (XRD)

XRD analysis of bare TiO₂ and ZnO/TiO₂ composites were given in Figure 1. These XRD charts are drawn by X' Pert High Score software. XRD pattern and corresponding characteristic 2θ values confirmed that TiO₂ particles in the composites are distinguished as anatase phase due to diffraction peaks obtained at 25.3, 37.8, 48.1, 53.9 and 55.1, 62.8, 68.9 and 75.3. The peaks appeared at 31.7, 34.3, 36.9, and 70 were corresponding to zincate ZnO [9]. The presence of minor peaks at 31.7, 34.3 and 36.9 for 3%ZnO/TiO₂ were due to the allow amount of ZnO. Therefore, increasing the loading of ZnO elevated the peaks of ZnO. Based on the XRD analysis, it can be concluded that


composite samples consisted of anatase TiO₂ and zincate ZnO. Based on XRD analysis we can conclude that charts of synthesized Nanocomposites have TiO₂ anatase phase and ZnO Wurtzite structure. Optic properties have a direct relationship with Nano sizes. Optic spectrum, and density of optic spectrum that is semiconductor changes when its size changes. Nanoparticles gained with data of the main part in each material with Scherer formula that is as follows:

$$D = (K \times \lambda) / (\beta \cos \theta) \quad (1)$$


Where K is Scherer fix number= 0.9 and λ is x-ray wave length=1/54a and β is peak width in the middle of maximum height and θ is brag diffraction angle and D is particles size based on Nanometer. Distance between Nano grid pages can be calculated from brag rule that is shown in relation2.

$$d = n\lambda / \sin \theta \quad (2)$$

By using Scherer formula and data of x-ray diffraction spectrum, size of Nanoparticles in the middle for different loading of ZnO is 50 nm.

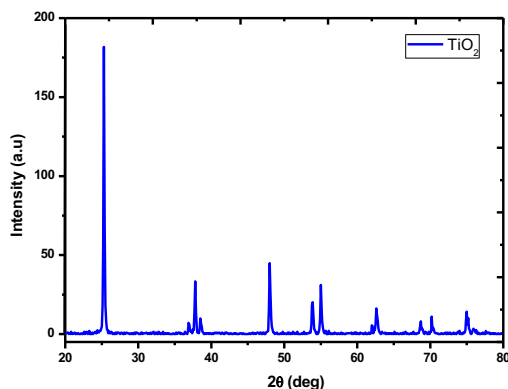

(a)

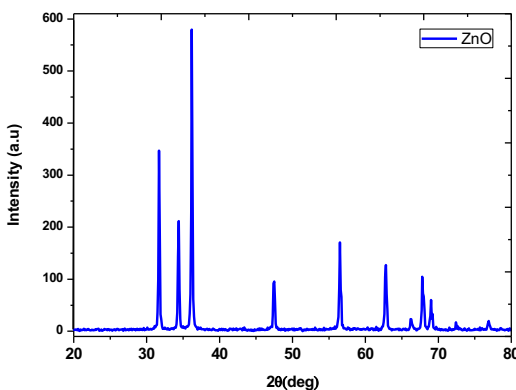

(b)

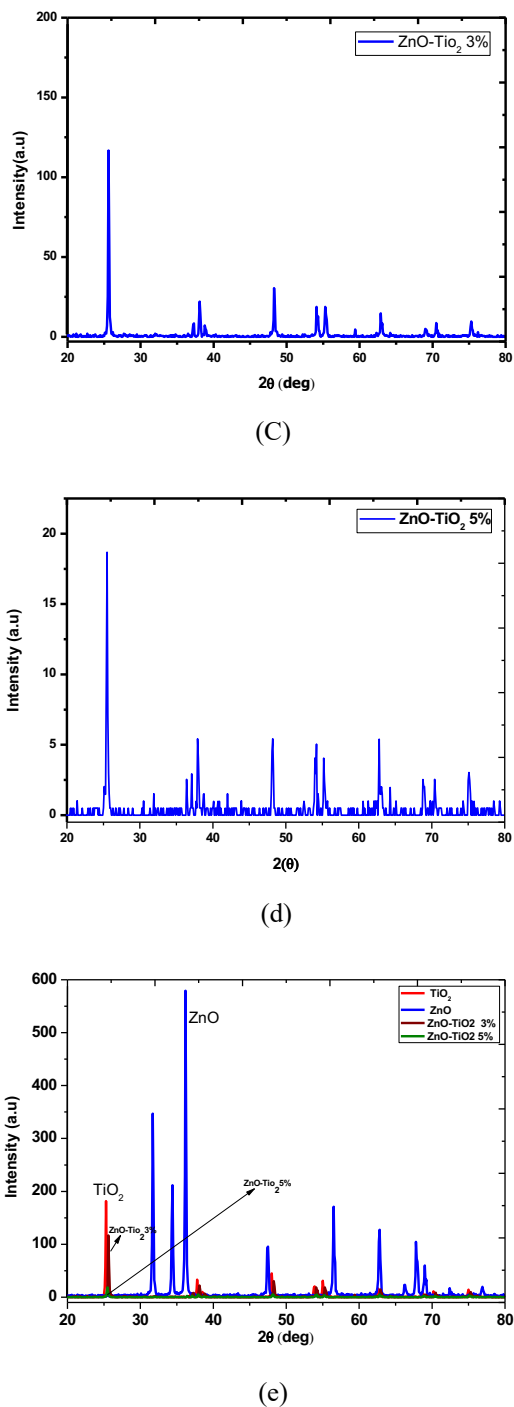


Figure 1. XRD pattern of (a) bare TiO₂ (b) ZnO (c) 3% ZnO/TiO₂(d) 5% ZnO/TiO₂ and (e) XRD for all samples

3.2 Measuring field-emission-scanning-electron-microscopy (FE-SEM)

The FE-SEM images of calcined ZnO/TiO₂ composites at

different ZnO loading are given in Figure 2. The impregnation of ZnO over TiO₂ is evident from the comparison of FE- SEM images of bare TiO₂ (Figure 2(a– b)) and synthesized composites at different loading of ZnO (Figure 2(c– e)). At a lower amount of ZnO, TiO₂ was the main component of the synthesized composites and ZnO was widely dispersed on the surface of TiO₂. It also showed that the dispersion of ZnO was homogeneous over the surface of support for 10%ZnO/TiO₂. Image analysis clearly showed an increase in surface coverage of TiO₂ by ZnO on increasing the loading of ZnO. Figure 2. at 1 μm magnification demonstrates the slight agglomeration and irregular spherical morphology of the calcined ZnO/TiO₂ composites [10]. The particle size of the synthesized composites was laid in the range of 15 nm– 100 nm with an average particle diameter of 50 nm. But because of the high density of Nanoparticles and tendency of the gathering of very big particles by using Scherer equation, the size of these Nanoparticles is the reason for particles scattering.


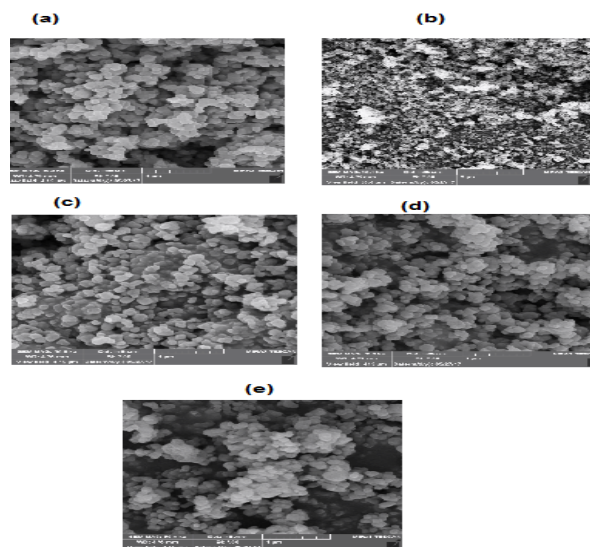


Figure 2. FE- SEM images of ZnO/TiO₂ composites (a) bare TiO₂ at 1 μm (b) bare TiO₂ at 5 μm (c) 3% ZnO/TiO₂ at 1 μm (d) 5% ZnO/TiO₂ at 1 μm (e) 10% ZnO/TiO₂ at 1 μm.


3.3 Ultraviolet-visible spectroscopy

One of the amazing methods for Nanoparticle analysis is using binders of the visible area and ultraviolet electromagnetic waves that are properties of adsorption and ultra-emit. Figure 3. is ultraviolet and visible adsorption binder of industrial powder TiO₂, ZnO and Nanocomposites of ZnO/TiO₂. As you can see in industrial powder, titanium dioxide has the highest adsorption invisible part, and in zinc oxide powder we have the highest adsorption in the ultraviolet region. Spectroscopy curve of visible-ultraviolet of Nanocomposites as we can see in curves when ZnO


loading increased, adsorption is more in the ultraviolet region. Adsorption in visible region decreases with much loading of ZnO. This decrease in adsorption is related with a decrease of photoanode level because of ZnO saturation in TiO₂ level and this is a reason of efficiency decrease or load increase of ZnO.

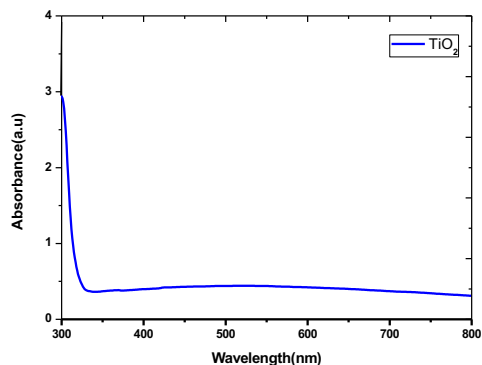


(a)

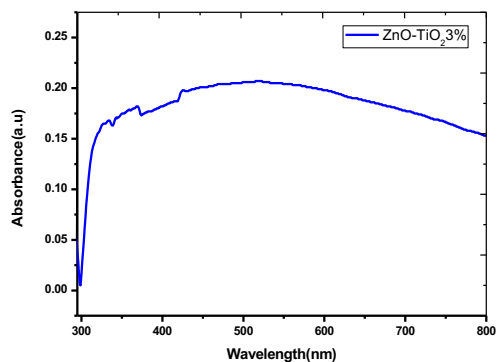

(b)

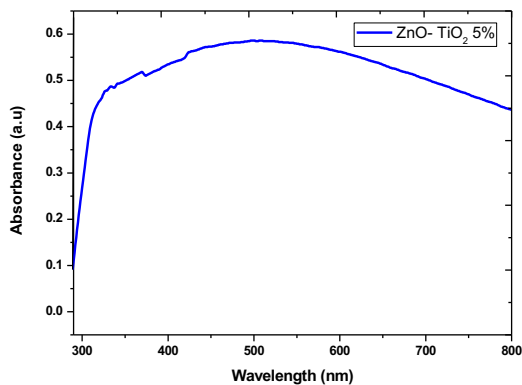

(c)

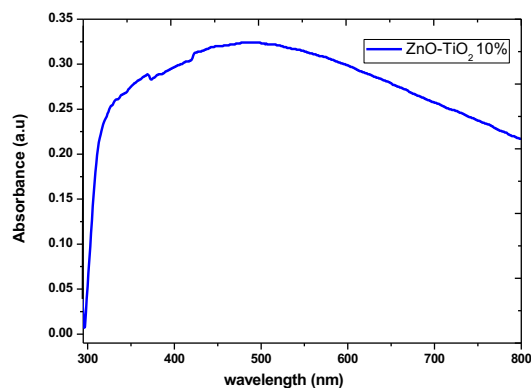

(d)

Figure 3. Ultraviolet visible spectroscopy of (a) bare TiO₂ (b) 3% ZnO/TiO₂(c) 5% ZnO/TiO₂ (d) 10% ZnO/TiO₂

The problem in Nanocomposite is the energy gained from Taok equation. Adsorption coefficient α is good with adsorption area that adsorption amount (A) and samples thickness (t) gained from equation (3).

$$\alpha = 2.3026 A / t \quad (3)$$

So the attenuation coefficient (k) gained from equation (4).

$$k = \alpha \lambda / 4\pi \quad (4)$$

Nanoparticle energy loss can be gained from equation (5).

$$\alpha h\nu = k[(h\nu - Eg)]^n \quad (5)$$

In this equation, α is optic adsorption coefficient, $h\nu$ is adsorption photon energy, Eg is energy loss and k is attenuation coefficient. Another important parameter that has been calculated from ultra violet-adsorption spectrum curve is the depth of penetration that is equal to the absorption coefficient. The invisible wavelength and depth of penetration is high but in ultraviolet wavelength because of powerful electron bit, conducting electron and descent photons reaches to least amount. Figure 4 is Taok curve of Nano composites. As you see Nanocomposite energy loss in comparison with titanium dioxide energy loss (3.22 eV) increased and by much loading of ZnO Nanocomposite energy loss increased.


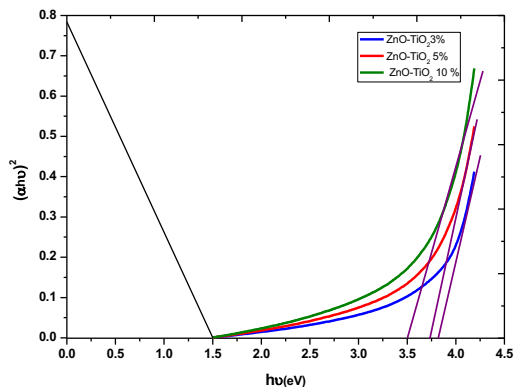



Figure 4. Bnd gap of (a) 3% ZnO/TiO₂ (b) 5% ZnO/TiO₂(c) 10% ZnO/TiO₂

3.4 Fourier-transform infrared spectroscopy (FTIR)


This technique works based on measuring the vibrating frequency of chemical bonds between atoms. Gained spectrum in infrared spectroscopy of Fourier Transform for the industrial powder of TiO₂ and ZnO for synthesized Nanocomposites is shown in figure 5. In the spectrum of industrial powder of TiO₂ there are peaks in 400-900 cm⁻¹ that is for tensile vibrations of TiO of anatase of TiO₂. Peaks in region 1630, 3450 cm⁻¹ are for bending and the tensile band of O-H bond that confirmed the existence of hydroxyl group in TiO₂ and existence of these peaks is the probability of their adsorption in ion level of Ti⁺⁴. Also, the peak in 2345 cm⁻¹ is for linked vibrations of C=O. This situation shows that in industrial powder level of TiO₂ there are a little water and CO₂ that is absorbed from the air's atmosphere. In the infrared spectrum of ZnO industrial powder, is a strong band in 469 cm⁻¹ that is for tensile frequencies of Zn-O. Peaks in 1630 and 3450 cm⁻¹ are for bending and a tensile band of O-H. As you can see three peaks in ZnO industrial powder is exists in a spectrum of industrial powder of TiO₂. In figure 5, the infrared spectrum for synthesized Nanocomposite is shown. As you can see a band in 469 cm⁻¹ exists that is for the tensile frequency of Zn-O and there are peaks in 400-900 cm⁻¹ that is for tensile vibrations of Ti-O of anatase phase of TiO₂ that is a confirmation of the existence of two materials of titanium dioxide and zinc oxide in synthesized Nanocomposites. Also three other peaks we can see that are those who existed in industrial powder and as we said because of Little adsorption of water and CO₂ from the air, it can have a negative effect in solar cell efficiency and synthesis should be done with high accuracy and in an isolated environment that peaks become very little.

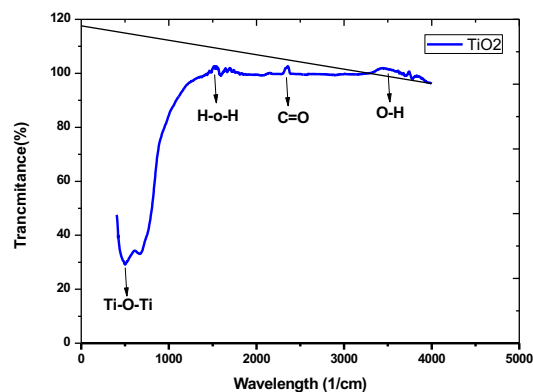

(a)

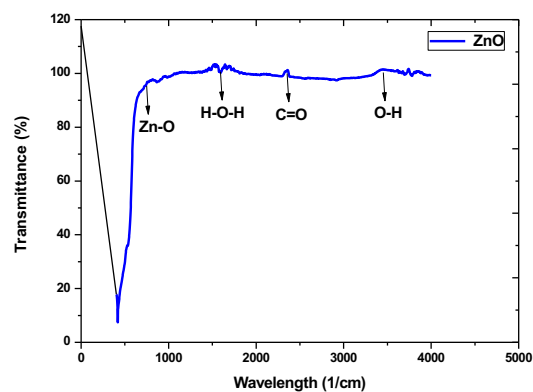

(b)

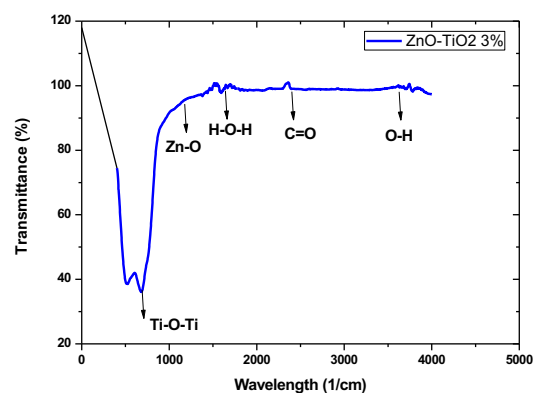

(c)

Figure 5. Fourier-transform infrared spectroscopy of (a) bare TiO₂ (b) ZnO (c) 3% ZnO/TiO₂

4 Conclusions

We used impregnation method to prepare ZnO/TiO₂ nano-composite structure with TiO₂ nano powder as the base. ZnO covers TiO₂ nano powder evenly. Scanning electron pictures are done from Nanocomposite powder and then we saw that these materials have a useful structure. X-ray diffraction is also done for structural properties finding and by using results they knew synthesized material and crystal structure parameters of that gained. Visible optic adsorption spectrum is done for properties finding of material and they saw that %3 ZnO/TiO₂ Nanocomposite had high adsorption towards other composites and it can be compared with pure TiO₂. Compared with pure TiO₂, ZnO/TiO₂ nano-composite structure has a better ability to absorb ultraviolet light.

References

- [1] L. Lhomme, S. Brosillon, D. Wolbert and J. Dussaud, Photocatalytic degradation of a phenylurea, chlortoluron, in water using an industrial titanium dioxide coated media. *Applied Catalysis B: Environmental*, **61(3-4)**, 227-235, 2005.
- [2] T. Aungpradit, P. Sutthivaiyakit, D. Martens, S. Sutthivaiyakit and A.A.F. Kettrup, Photocatalytic degradation of triazophos in aqueous titanium dioxide suspension: identification of intermediates and degradation pathways. *Journal of hazardous materials*, **146(1-2)**, 204-213, 2007.
- [3] X.B. Chen and S.S. Mao, Titanium dioxide nanomaterials: synthesis, properties, modifications, and applications. *Chemical reviews*, **107(7)**, 2891-2959, 2007.
- [4] C.S. Lim, Preparation of TiO₂ Coated ZnO Nanocomposite by a Two-Step Chemical Method. *Asian Journal of Chemistry*, **23(11)**, 4862, 2011.
- [5] K. Ohshima, K. Tsuto, K. Okuyama and N. Tohge, Preparation of ZnO-TiO₂ composite fine particles using the ultrasonic spray pyrolysis method and their characteristics on ultraviolet cutoff. *Aerosol science and technology*, **19(4)**, 468-477, 1993.
- [6] G. Marci, V. Augugliaro, M.J. López-Munoz, C. Martin, L. Palmisano, V. Rives, M. Schiavello, R.J.D. Tilley and A.M. Venezia. Preparation characterization and photocatalytic activity of polycrystalline ZnO/TiO₂ systems. 1. Surface and bulk characterization. *The Journal of Physical Chemistry B*, **105(5)**, 1026-1032, 2001.
- [7] Z.C. Liu, D.X. Zhou, S.P. Gong and H. Li, J. Studies on a basic question of zinc titanates. *Journal of alloys and compounds*, **475(1-2)**, 840-845, 2009.
- [8] M.R. Hoffman, S.T. Martin, W. Choi and D.W. Bahnemann, Environmental applications of semiconductor photocatalysis. *Chemical reviews*, **95(1)**, 69-96, 1995.
- [9] G. Marci, V. Augugliaro, M.J. López-Muñoz, C. Martin, L. Palmisano, V. Rives, ... & A. M. Venezia, Preparation characterization and photocatalytic activity of polycrystalline ZnO/TiO₂ systems. 1. Surface and bulk characterization. *The Journal of Physical Chemistry B*, **105(5)**, 1026-1032, 2001.
- [10] L.S. Yoong, F.K. Chong, B.K. Dutta, Development of copper-doped TiO₂ photocatalyst for hydrogen production under visible light. *Energy*, **34(10)**, 1652-1661, 2009.