2015

Analytical Solutions for Free Vibration of Strongly Nonlinear Oscillators

M. Abul-Ez
Department of Mathematics, Faculty of Science, Sohag University, Sohag, 82524, Egypt.,
gamalm2010@yahoo.com

G. M. Ismail
Department of Mathematics, Faculty of Science, Sohag University, Sohag, 82524, Egypt.,
gamalm2010@yahoo.com

M. M. El-Moshneb
Department of Mathematics, Faculty of Science, Sohag University, Sohag, 82524, Egypt.,
gamalm2010@yahoo.com

Analytical Solutions for Free Vibration of Strongly Nonlinear Oscillators

M. Abul-Ez, G. M. Ismail* and M. M. El-Moshneb

Department of Mathematics, Faculty of Science, Sohag University, Sohag, 82524, Egypt.

Abstract: In this paper, a nonlinear free vibration of strongly nonlinear oscillators is studied. To this end, we propose a novel technique using He's frequency-amplitude formulation and He's energy balance method called iteration perturbation procedure. A novel technique called iteration perturbation procedure and variational iteration method are presented to obtain the relationship between amplitude and angular frequency. The obtained results are compared with the numerical solution obtained by using the Runge–Kutta method and shown in graphs indicating the effectiveness and convenience of the analytical approximate solutions. These approaches are very effective and simple and with only one iteration leads to high accuracy of the solutions. It is predicted that those methods can be found wide applications in engineering problems, as indicated in this paper.

Keywords: Periodic solution, nonlinear oscillators, iteration perturbation procedure, variational iteration method.

1 Introduction

Nonlinear phenomena play a crucial role in applied mechanics and physics and have a significant importance in mechanical and structural dynamics for the comprehensive understanding and accurate prediction of motion. Most of real systems are modeled by nonlinear differential equations which are important issues in mechanical structures, mathematical physics and engineering. It is very interesting for the scientific community to use applied mathematics to solve dynamic problems. In recent years, much attention has been devoted to the advanced techniques to investigate the nonlinear systems such as frequency-amplitude formulation (FAF) [1,2,3], energy balance method (EBM) [4,5,6,7], variational iteration method (VIM) [8, 9,10,11], homotopy perturbation method (HPM) [12,13, 14], homotopy analysis method (HAM) [15,16], variational approach (VA) [17,18], max–min approach (MNA) [19] and which are introduced for nonlinear oscillatory systems.

In the following section of this paper, the iteration perturbation procedure and the variational iteration method are applied to an important and interesting problems in nonlinear vibration systems.

2 Methods of solution

2.1 Description of the iteration perturbation procedure

We consider a generalized nonlinear oscillator in the form:

$$\ddot{u} + f(u, \dot{u}, \ddot{u}) = 0, \quad u(0) = A, \quad \dot{u}(0) = 0. \quad (1)$$

Introducing the following new function $H(t)$ in the form:

$$H(t) = \int_0^T (\ddot{u} + f(u, \dot{u}, \ddot{u})) \cos(\omega t) dt = 0, \quad T = \frac{2\pi}{\omega}. \quad (2)$$

We begin the procedure with the simplest trial function to determine the angular frequency ω:

$$u = A \cos \omega t. \quad (3)$$

Substituting the above trial functions into Eq. (2) results in, the following residual

$$H(t) = \int_0^{2\pi/\omega} \left[-A\omega^2 \cos \omega t + f(A \cos \omega t, -A\omega \sin \omega t, -A\omega^2 \cos \omega t) \cos(\omega t) \right] dt = 0. \quad (4)$$

Solving the above equation, the relationship between the amplitude and frequency of the oscillator can be obtained:

* Corresponding author e-mail: gamalm2010@yahoo.com

2.2 Description of the variational iteration method

To illustrate its basic concepts of the variational iteration method, we consider the following general differential equation [8]:

$$Lu + Nu = g(x), \qquad (5)$$

where, L is a linear operator, and N a nonlinear operator, $g(x)$ an inhomogeneous or forcing term. According to the variational iteration method, we can construct a correct functional as follows:

$$u_{(n+1)}(t) = u_n(t) + \int_0^t \lambda \left[Lu_n(\tau) + N\tilde{u}_n(\tau) - g(\tau) \right] d\tau, \qquad (6)$$

where λ is a general Lagrange multiplier, which can be identified optimally via the variational theory, the subscript n denotes the n-th approximation, $\tilde{u}_n$ is considered as a restricted variation, i.e. $\delta \tilde{u}_n = 0$.

In the coming sections of the paper, we clarify the rigid rood rocks on the circular surface and the nonlinear free vibration of an oscillator with inertia and static type cubic nonlinearities by using iteration perturbation procedure and variational iteration method. Besides numerical Runge-Kutta method of order 4 will be compared with the analytical results.

3 Motion of a rocking rigid rod

The motion's equation of the rigid rod which rocks on the circular surface without slipping is: (7) where l is rigid rod's length, r is radius of circular surface and u is the function of angle of each time [20,21,22].

The motion equation of the system by applying Lagrangian [20] can be found as:

$$\left(\frac{1}{12}l^2 + r^2u^2 \right) \ddot{u} + r^2u\,\dot{u}^2 + r\,g\,u\,\cos u = 0, \qquad (7)$$

under the initial conditions:

$$u(0) = A, \quad \dot{u}(0) = 0. $$

3.1 Application of iteration perturbation procedure

As we introduced $H(t)$ in Eq. (2) we have

$$H(t) = \int_0^{2\pi/\omega} \left[\left(\frac{1}{12}l^2 + r^2u^2 \right) \ddot{u} + r^2u\,\dot{u}^2 \right. \\ \left. + r\,g\,u\,\cos u \right] \cos(\omega t) dt = 0. \qquad (8)$$

Substituting the above trial functions into Eq. (8) results in, the following residual

$$H(t) = \frac{A\pi}{768\omega} \left[(192 - 72A^2 + 5A^4)gr - 16(l^2 + 6A^2r^2)\omega^2 \right] = 0. \qquad (9)$$

Solving the above equation, the relationship between the amplitude and frequency of the oscillator can be obtained as follow:

$$\omega = \sqrt{\frac{192g\,r - 72A^2g\,r + 5A^4g\,r}{16l^2 + 96A^2r^2}}, \qquad (10)$$

Hence, the approximate solution can be readily obtained

$$u(t) = A\cos\left(\sqrt{\frac{192g\,r - 72A^2g\,r + 5A^4g\,r}{16l^2 + 96A^2r^2}}\,t \right). \qquad (11)$$

3.2 Application of variational iteration method

Assume that the angular frequency of Eq (7) is ω, we have the following linearized equation:

$$\ddot{u} + \omega^2 u = 0. \qquad (12)$$

So we can rewrite Eq. (7) in the form

$$\ddot{u} + \omega^2 u + g(u) = 0. \qquad (13)$$

where

$$g(u) = r^2u\dot{u}^2 + rgu(1 - \frac{1}{2}u^2 + \frac{1}{24}u^4) - \omega^2 u \qquad (14)$$

Applying the variational iteration method, the following iterative formula is formed as:

$$u_{(n+1)}(t) = u_n(t) + \int_0^t \lambda \left[\left(\frac{1}{12}l^2 + r^2u^2 \right) \ddot{u}(\tau) \right. \\ \left. + \omega^2 u_n(\tau) - g(\tau) \right] d\tau \qquad (15)$$

the stationary conditions can be obtained as follows:

$$\left. \begin{array}{c} \lambda''(\tau) + \omega^2\lambda(\tau) = 0, \\ \lambda(\tau)|_{\tau=t} = 0, \\ 1 - \lambda'(\tau)|_{\tau=t} = 0. \end{array} \right\} \qquad (16)$$

The Lagrange multiplier, therefore, can be identified as;

$$\lambda = \frac{1}{\omega}\sin\omega\,(\tau - t) \qquad (17)$$

Substituting the identified multiplier into Eq. (15) results in the following iteration formula:

$$u_{(n+1)}(t) = u_n(t) + \frac{1}{\omega}\int_0^t \sin\omega\,(\tau - t) \left[\left(\frac{1}{12}l^2 + r^2u^2 \right) \ddot{u}(\tau) \right. \\ \left. + r^2u\dot{u}^2 + rgu\left(1 - \frac{1}{2}u^2 + \frac{1}{24}u^4 \right) \right] d\tau \qquad (18)$$

Substituting $u_0 = A\cos\omega t$. as a trail function into Eq (7) yields the residual as follows:

$$R_0(t) = \left(\frac{-Al^2\omega^2}{12} - \frac{3r^2A^3\omega^2}{4} + \frac{r^2A^3\omega^2}{2} - \frac{r^2A^3\omega^2}{4} \right. \\ \left. + rgA - \frac{3rgA^3}{8} + \frac{5rgA^5}{192} \right) \cos\omega t - \left(\frac{r^2A^3\omega^2}{4} \right. \\ \left. + \frac{r^2A^3\omega^2}{8} + \frac{rgA^3}{8} - \frac{5rgA^5}{384} \right) \cos 3\omega t \\ + \frac{rgA^5}{384}\cos 5\omega t. \qquad (19)$$
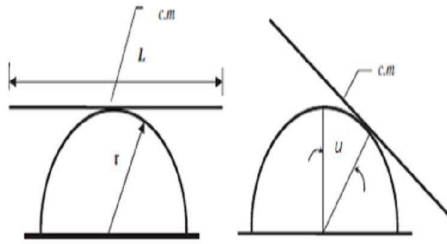
Fig. 1: Schematic of the rigid rod rocks on a circular surface without slipping.

(a) $A = 1$, $g = 9.81$, $r = 3$, $L = 12$

(b) $A = 1$, $g = 9.81$, $r = 1$, $L = 12$

(c) $A = \pi / 6$, $g = 9.8$, $r = 1$, $L = 2$

(d) $A = \pi / 18$, $g = 9.8$, $r = 1$, $L = 2$

Fig. 2: The comparison between analytical approximate solutions (- - -) and numerical solution (—).

By the formulation (18), we can obtain

$$u_1(t) = A\cos\omega t + \int_0^t \frac{1}{\omega}\sin\omega(\tau - t)R_0(\tau)d\tau \qquad (20)$$

In order to ensure that no secular terms appear in u_1, resonance must be avoided. To do so, the coefficient of $cos(\omega t)$ in Eq. (19) requires being zero, i.e.,

$$\omega = \sqrt{\frac{192g\,r - 72A^2g\,r + 5A^4g\,r}{16l^2 + 96A^2r^2}}. \qquad (21)$$

Hence, the approximate solution can be readily obtained

$$u(t) = A\cos\left(\sqrt{\frac{192g\,r - 72A^2g\,r + 5A^4g\,r}{16l^2 + 96A^2r^2}}\,t\right). \qquad (22)$$

To illustrate the validity of the analytical approximate solutions for this example, the results are compared with the numerical solution, using fourth order Runge-Kutta method (R-K) in Fig 2 (a-d).
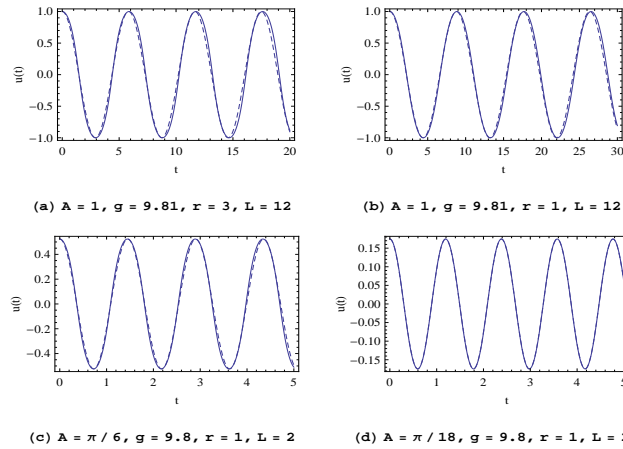
4 Nonlinear free vibration of systems with inertia and static type cubic nonlinearities

Consider free vibration of a conservative, single-degree-of-freedom system with a mass attached to linear and nonlinear springs in series as shown in Fig 3. After transformation, the motion is governed by a nonlinear differential equation of motion [23,24,25,26] as:

$$\left(1 + 3\varepsilon\eta u^2\right)\ddot{u} + 6\varepsilon\eta u\,\dot{u}^2 + \omega_0^2 u + \varepsilon\,\omega_0^2\,u^3 = 0, \qquad (23)$$

under the initial conditions:

$$u(0) = A, \quad \dot{u}(0) = 0.$$

where

$$\left.\begin{array}{c} u(t) = y_2(t) - y_1(t), \quad \varepsilon = \beta/k_2, \quad \xi = k_2/k_1, \\[2mm] \eta = \dfrac{\xi}{1+\xi}, \qquad \omega_0^2 = \dfrac{k_2}{m(1+\xi)}. \end{array}\right\}$$

In which k_1 and k_2 are the linear and nonlinear spring constant, respectively [27]. Parameters ε, β, ν, ω_0, m and ξ are perturbation parameter, coefficient of the nonlinear spring force, deflection of the nonlinear spring, natural frequency, mass and the ratio of the springs constant.

4.1 Application of iteration perturbation procedure
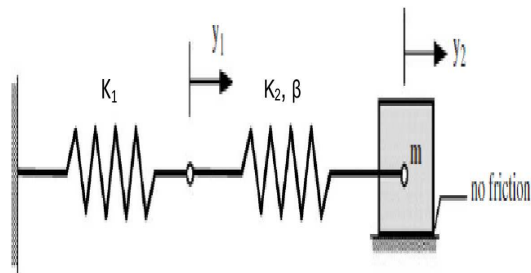
Similar to previous example we have

$$H(t) = \frac{A\pi}{4\omega}\left[\omega_0^2\left(4 + 3\varepsilon A^2\right) - \left(4 + 3\varepsilon\eta A^2\right)\omega^2\right] = 0. \qquad (24)$$

Finally, the frequency amplitude relationship can be obtained as:

$$\omega = \sqrt{\frac{4\omega_0^2 + 3\varepsilon\omega_0^2 A^2}{4 + 3\varepsilon\eta A^2}}, \qquad (25)$$

Hence, the approximate solution can be readily obtained

$$u(t) = A\cos\left(\sqrt{\frac{4\omega_0^2 + 3\varepsilon\omega_0^2 A^2}{4 + 3\varepsilon\eta A^2}}\,t\right). \qquad (26)$$

Fig. 3: Nonlinear free vibration of a system of mass with serial linear and nonlinear stiffness on a frictionless contact surface.

(a) $\epsilon = 0.1$, $A = 1$, $\eta = 0.5$, $\omega_0^2 = 300$;

(b) $\epsilon = 0.1$, $A = 1$, $\eta = 0.25$, $\omega_0^2 = 100$;

(c) $\epsilon = 1$, $A = 1$, $\eta = 0.5$, $\omega_0^2 = 300$;

(d) $\epsilon = 5$, $A = 1$, $\eta = 0.5$, $\omega_0^2 = 200$;

Fig. 4: The comparison between analytical approximate solutions (- - -) and numerical solution (—).

4.2 Application of variational iteration method

According to the previous example, the frequency based on variational iteration method may be expressed as

$$\omega = \sqrt{\frac{4\omega_0^2 + 3\varepsilon\omega_0^2 A^2}{4 + 3\varepsilon\eta A^2}}. \tag{27}$$

Hence, the approximate solution can be readily obtained

$$u(t) = A\cos\left(\sqrt{\frac{4\omega_0^2 + 3\varepsilon\omega_0^2 A^2}{4 + 3\varepsilon\eta A^2}}t\right). \tag{28}$$

To illustrate the validity of the analytical approximate solutions for this example, the results are compared with an accurate numerical solution, using fourth order Runge-Kutta method (R-K) in Fig 4 (a-d).

5 Conclusion

In this paper, we have shown the effectiveness and efficiency of the iteration perturbation procedure introduced in this paper and the variational iteration method in obtaining analytic approximate solutions to nonlinear free vibration of strongly nonlinear oscillators. We compared our results with the exact result obtained numerically by the use of Runge-Kutta fourth-order method and our comparison shows that the two methods considered in this paper give accurate results. Moreover, the two methods showcased in this paper, are very easy and simple to handle as they do not involve rigorous calculation processes as well as complex mathematical ideas. Though more research is required in the light of gaining more information as to how these approximate methods affects real physical systems, this paper presents a step towards a successful and positive implementation of the two methods.
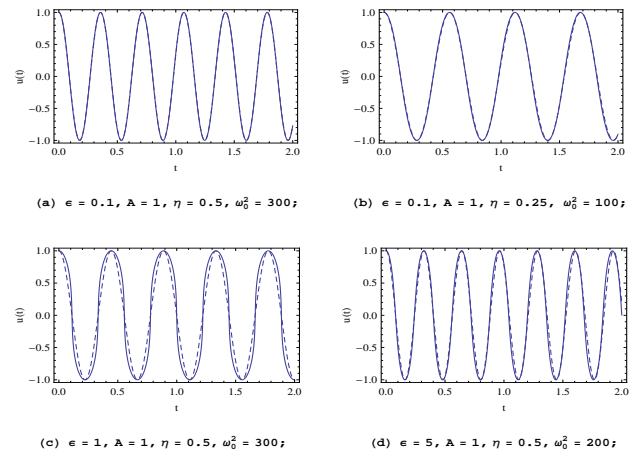
References

[1] J. H. He, Comment on He's frequency formulation for nonlinear oscillators, *European Journal of Physics,* **29,** 19-22 (2008).

[2] J. H. He, An improved amplitude-frequency formulation for nonlinear oscillators, *International Journal of Nonlinear Science and Numerical Simulation,* **9**, 211-212 (2008).

[3] A. G. Davodi, D. D. Gangi, R. Azami, H. Babazadeh, Application of improved amplitude-frequency formulation to nonlinear differential equation of motion equations, *Modern Physics Letters B*, **23,** 3427-3436 (2009).

[4] M. Bayat, M. shahidi, A. Barari, G. Domairry, Analytical evaluation of the nonlinear vibration of coupled oscillator systems, Zeitschrift fuer Naturforschung. Section A: *A Journal of Physical Sciences*, **66**, 16-25 (2011).

[5] M. Bayat, I. Pakar, M. Bayat, Application of he's energy balance method for pendulum attached to rolling wheels that are restrained by a spring, *International Journal of Physical Sciences*, **7**, 913-921 (2012).

[6] Z. H, Li, Periodic solutions for some strongly nonlinear oscillators by He's energy balance method, *Computers and Mathematics with Applications*. **58**, 2423-2426 (2009).

[7] I. Mehdipour, D. D. Ganji, M. Mozaffari, Application of the energy balance method to nonlinear vibrating equations, *Current Applied Physics*, **10,** 104-112 (2010).

[8] J. H. He, Variational iteration method-a kind of non-linear analytical technique: some examples, *International Journal of Non-Linear Mechanics*, **34,** 699-708 (1999).

[9] D. D. Ganji, G. Afrouzi, R. Talarposhti, Application of he's variational iteration method for solving the reaction-diffusion equation with ecological parameters, *Computers and Mathematics with Applications*, **54**, 1010-1017, (2007).

[10] I. Pakar, M. Bayat, M. Bayat, On the approximate analytical solution for parametrically nonlinear excited oscillators, *Journal of Vibroengineering*, **14,** 423-429 (2012).

[11] N. Herisanu, V. Marinca, A modified variational iteration method for strongly nonlinear problems, *Nonlinear Science Letters A*, **1,** 183-192 (2010).

[12] J. H. He, A coupling method of a homotopy technique and a perturbation technique for non-linear problems, *International Journal of Non-Linear Mechanics,* **35**, 37-43 (2000).

[13] J. H. He, Application of homotopy perturbation method to nonlinear wave equations, *Chaos Solitons and Fractals*, **26,** 695-700 (2005).

[14] D. D. Ganji, The application of He's homotopy perturbation method to nonlinear equations arising in heat transfer, *Physics Letters A,* **355,** 337-341 (2006).

[15] A. R. Ghotbi, M. Omidvar, A. Barari, Infiltration in unsaturated soils-An analytical approach, *Computers and Geotechnics,* **38,** 777-782 (2011).

[16] S. Liao, Homotopy analysis method and its application. PhD thesis, Shanghai Jiao Tong University, Shanghai, 1992 China.

[17] J. H. He. Variational approach for nonlinear oscillators. *Chaos Solitons and Fractals*, **34,** 1430-1439, (2007).

[18] M. Bayat, M. Bayat, M. Bayat. An analytical approach on a mass grounded by linear and nonlinear springs in series. International *Journal of Physical Sciences*, **6,** 229-236 (2011).

[19] M. Bayat, I. Pakar, G. Domairry, Recent developments of some asymptotic methods and their applications for nonlinear vibration equations in engineering problems: A review, *Latin American Journal of Solids and Structures*, **9,** 145-234 (2012).

[20] E. W. Gaylord, Natural frequencies of two nonlinear systems compared with the pendulum, *Journal of Applied Mechanics,* **26,** 145-146 (1959).

[21] S. S. Ganji, D.D. Ganji, H. Babazadeh, S. Karimpour, Variational approach method for nonlinear oscillations of the motion of a rigid rod rocking back and cubic, *Progress In Electromagnetics Research*, **4**, 23-32, (2008).

[22] A. Fereidoona, M. Ghadimib, A. Bararic, H. D. Kalijid, G. Domairry, Nonlinear vibration of oscillation systems using frequency-amplitude formulation, *Shock and Vibration,* **19,** 323-332 (2012).

[23] M. N. Hamdan, N. H. Shabaneh, On the period of large amplitude free vibrations of conservative autonomous oscillators with static and inertia type cubic non-linearities, *Journal of Sound and Vibration,* **199,** 737-750 (1997).

[24] M. I. Qaisi, N. S. Al-Huniti, Large amplitude free vibration of a conservative system with inertia and static nonlinearity, *Journal of Sound and Vibration,* **242,** 1-7 (2001).

[25] S. Telli, O. Kopmaz, Free vibrations of a mass grounded by linear and nonlinear springs in series, *Journal of Sound and Vibration,* **289,** 689-710 (2006).

[26] S. K. Lai, C. W. Lim, Accurate approximate analytical solutions for nonlinear free vibration of systems with serial linear and nonlinear stiffness, *Journal of Sound and Vibration* **307,** 720-736 (2007).

[27] L. Meirovitch, Elements of Vibration Analysis. 1st Edn, McGraw-Hill, New York, 1975, ISBN: 0-07-041340-1.