

2014

Gradient Controllability for Hyperbolic Systems

Hamid Bourray

Faculty of Sciences, Moulay Ismail University, Meknes, Morocco, imadharraki@gmail.com

Ali Boutoulout

Faculty of Sciences, Moulay Ismail University, Meknes, Morocco, imadharraki@gmail.com

Imad El Harraki

Faculty of Sciences, Moulay Ismail University, Meknes, Morocco, imadharraki@gmail.com

Follow this and additional works at: <https://digitalcommons.aaru.edu.jo/isl>

Recommended Citation

Bourray, Hamid; Boutoulout, Ali; and El Harraki, Imad (2014) "Gradient Controllability for Hyperbolic Systems," *Information Sciences Letters*: Vol. 3 : Iss. 1 , Article 2.

Available at: <https://digitalcommons.aaru.edu.jo/isl/vol3/iss1/2>

This Article is brought to you for free and open access by Arab Journals Platform. It has been accepted for inclusion in Information Sciences Letters by an authorized editor. The journal is hosted on Digital Commons, an Elsevier platform. For more information, please contact rakan@aar.edu.jo, marah@aar.edu.jo, dr_ahmad@aar.edu.jo.

Gradient Controllability for Hyperbolic Systems

Hamid Bourray, Ali Boutoulout and Imad El Harraki *

Faculty of Sciences, Moulay Ismail University, Meknes, Morocco

Received: 18 Jul. 2013, Revised: 23 Sep. 2013, Accepted: 25 Sep. 2013

Published online: 1 Jan. 2014

Abstract: This paper deals with the problem of regional gradient controllability of hyperbolic systems. We show how one can reach a desired state gradient given only on a part of the system evolution domain. Also we explore a numerical approach using Hilbert Uniqueness Method (HUM) that leads to an explicit formula of the optimal control. The obtained results are successfully tested through computer simulations leading to some conjectures.

Keywords: hyperbolic systems, regional gradient controllability, strategic actuator, HUM approach.

1 Introduction

Many real systems are purely of distributed nature, and many of the systems conceived by humans are naturally very complex. Indeed, every complex problem always necessitates a complex solution. In spite of the fact that the most elaborated mathematical methods have been developed, a lot is to be done to bridge the gap between applied mathematics and the industrial world problems. The system theory contributed to fulfil this objective, and thus, obtain exploitable results in different domains. Particular, the controllability is one of the most interesting notions of the system theory. Various previous researches treated the problem of controllability of hyperbolic systems which are composed of wave equation that we find in many real problems [1,2]. Copious works deal with the problem of steering a system (S) to a prescribed state defined on a space domain Ω , were considered and studied in (Curtain and Zwart, 1995) [3], and the references therein. The study of controllability in hyperbolic systems was the subject of countless researches (Dolecki and Russell 1977, El Jai and Pritchard 1988, Lions 1988) ([4],[5]). The regional case was studied by Zerrik et al (2003) [6]. Pussed by the need to control the flux Zerrik et al.(1999)[7] developed the gradient controllability of parabolic systems. Our study will be devoted to the regional gradient controllability of the hyperbolic systems. This paper is organized as follows. Section 2 present a definition and characterization of regional controllability of hyperbolic systems. Section 3 defines the actuators gradient strategic

and elaborates on its relationship with regional gradient controllability. Section 4 focusses on the approach devoted to the computation of the optimal control that permits to attain a gradient in a subregion ω of Ω . At the last, the obtained results are successfully applied in one dimensional system with two numerical examples leading to some conjectures.

2 Regional gradient controllability

2.1 Considered system

Let Ω be an open bounded subset of \mathbb{R}^n with regular boundary $\partial\Omega$. For $T > 0$ we denote $Q = \Omega \times]0, T[$, $\Sigma = \partial\Omega \times]0, T[$ and we consider the hyperbolic system defined by

$$\begin{cases} \frac{\partial^2 y(x,t)}{\partial t^2} - Ay(x,t) = Bu(t) & \text{in } Q \\ y(x,0) = y_0(x), \frac{\partial y}{\partial t}(x,0) = y_1(x) & \text{in } \Omega \\ \frac{\partial y(\xi,t)}{\partial \nu_A} = 0 & \text{on } \Sigma \end{cases} \quad (1)$$

where A is a second-order elliptic linear symmetric operator given by:

$$\begin{cases} A = - \sum_{i,j=1}^n \partial_i(a_{ij}\partial_j) \text{ with } a_{ij} = a_{ji} \in \mathcal{C}^1(\Omega) \text{ and there exists } \alpha > 0 \\ \text{such that } \sum_{i,j=1}^n a_{ij}\xi_i\xi_j \geq \alpha \sum_{i=1}^n |\xi_i|^2 \quad \forall \xi = (\xi_1, \dots, \xi_n) \in \mathbb{R}^n \end{cases} \quad (2)$$

* Corresponding author e-mail: imadharraki@gmail.com



with domain

$$D(A) = \left\{ y \in H^2(\Omega), \frac{\partial y(\xi, t)}{\partial \nu_A} = 0 \text{ on } \partial\Omega \right\}. \quad (3)$$

$B \in \mathcal{L}(U, H^1(\Omega))$ where $U = L^2(0, T; \mathbb{R}^p)$ and p is the number of actuators, $(y_0, y_1) \in D(A) \times H^1(\Omega)$. We denote $(y_u(t), \frac{\partial y_u}{\partial t}(t))$ the solution of the equation (1). If we denote by $\bar{A} = \begin{pmatrix} 0 & I \\ A & 0 \end{pmatrix}$

$z = (y, \frac{\partial y}{\partial t})$ and $\bar{B}u = (0, Bu)$ then the system(1) can be written as:

$$\begin{cases} \frac{\partial z(x, t)}{\partial t} = \bar{A}z(x, t) + \bar{B}u(t) & \text{in } \mathcal{Q} \\ z(0) = (y_0, y_1)^t & \text{in } \Omega \end{cases} \quad (4)$$

for all $(z_1, z_2) \in D(\bar{A}) = D(A) \times H^1(\Omega)$ the solution of the system (4) is expressed using the semi-group $(\bar{S}(t))_{t \geq 0}$ generated by \bar{A} and given by

$$z(t) = \bar{S}(t)z_0 + \int_0^t \bar{S}(t - \tau)\bar{B}u(\tau)d\tau \quad (5)$$

With the assumption that the operator A admits basis of eigenfunctions w_{n_j} associated with the eigenvalues λ_n of multiplicity r_n .

$$\bar{S}(t)z(\cdot) = \begin{pmatrix} \sum_{n=1}^{\infty} \sum_{j=1}^{r_n} \left[\langle z_1, \omega_{n_j} \rangle \cos(\sqrt{-\lambda_n}t) + \frac{1}{\sqrt{-\lambda_n}} \langle z_2, \omega_{n_j} \rangle \sin(\sqrt{-\lambda_n}t) \right] \omega_{n_j}(\cdot) \\ \sum_{n=1}^{\infty} \sum_{j=1}^{r_n} \left[(-\sqrt{-\lambda_n}) \langle z_1, \omega_{n_j} \rangle \sin(\sqrt{-\lambda_n}t) + \langle z_2, \omega_{n_j} \rangle \cos(\sqrt{-\lambda_n}t) \right] \omega_{n_j}(\cdot) \end{pmatrix}$$

and

$$\int_0^t \bar{S}(t - \tau)\bar{B}u(\tau)d\tau = \begin{pmatrix} \sum_{n=1}^{\infty} \sum_{j=1}^{r_n} \left[\int_0^t \frac{1}{\sqrt{-\lambda_n}} \langle Bu(\tau), \omega_{n_j} \rangle \sin(\sqrt{-\lambda_n}(t - \tau))d\tau \right] \omega_{n_j}(\cdot) \\ \sum_{n=1}^{\infty} \sum_{j=1}^{r_n} \left[\int_0^t \langle Bu(\tau), \omega_{n_j} \rangle \cos(\sqrt{-\lambda_n}(t - \tau))d\tau \right] \omega_{n_j}(\cdot) \end{pmatrix}$$

For $\omega \subset \Omega$ an open subregion of Ω with positive Lebesgue measure, let χ_ω be the restriction function defined by

$$\chi_\omega : (L^2(\Omega))^n \times (L^2(\Omega))^n \longrightarrow (L^2(\omega))^n \times (L^2(\omega))^n$$

$$(z_1, z_2) \mapsto \chi_\omega(z_1, z_2) = (z_1, z_2)|_\omega$$

and χ_ω^* denotes the adjoint operator, given by

$$\chi_\omega^* : (L^2(\omega))^n \times (L^2(\omega))^n \longrightarrow (L^2(\Omega))^n \times (L^2(\Omega))^n$$

$$(z_1, z_2) \mapsto \chi_\omega^*(z_1, z_2) = \begin{cases} (z_1, z_2) & \text{in } \omega \\ 0 & \text{in } \Omega \setminus \omega \end{cases}$$

Consider the operator ∇ given by the formula

$$\nabla : H^1(\Omega) \longrightarrow (L^2(\Omega))^n$$

$$y \mapsto \nabla y = \left(\frac{\partial y}{\partial x_1}, \dots, \frac{\partial y}{\partial x_n} \right)$$

And the operator $\tilde{\nabla}$ given by the formula

$$\tilde{\nabla} : H^1(\Omega) \times H^1(\Omega) \longrightarrow (L^2(\Omega))^n \times (L^2(\Omega))^n$$

$$(y_0, y_1) \mapsto \tilde{\nabla}(y_0, y_1) = (\nabla y_0, \nabla y_1)$$

Let us give some definitions about the regional controllability of the gradient.

2.2 Definition and properties

Definition 1.

–The system (1) is said to be ω -exactly gradient controllable if for all $(g_p^d, g_s^d) \in (L^2(\omega))^n \times (L^2(\omega))^n$ there exists $u \in U$ such that

$$\chi_\omega(\nabla y_u(T), \nabla \frac{\partial y_u}{\partial t}(T)) = (g_p^d, g_s^d)$$

–The system (1) is said to be ω -weakly gradient controllable if for all $\varepsilon > 0$ for all $(g_p^d, g_s^d) \in (L^2(\omega))^n \times (L^2(\omega))^n$ there exists $u \in U$ such that

$$\| \chi_\omega(\nabla y_u(T), \nabla \frac{\partial y_u}{\partial t}(T)) - (g_p^d, g_s^d) \|_{(L^2(\omega))^n \times (L^2(\omega))^n} \leq \varepsilon$$

Consider the operator

$$H : L^2(0, T, \mathbb{R}^p) \longrightarrow H^1(\Omega) \times H^1(\Omega)$$

$$u \mapsto (y_u(T), \frac{\partial y_u}{\partial t}(T))$$

It is clear that the system (1) is ω -exactly (resp. ω -weakly) gradient controllable if

$$Im \chi_\omega \tilde{\nabla} H = (L^2(\omega))^n \times (L^2(\omega))^n$$

(resp. $Im \chi_\omega \tilde{\nabla} H = (L^2(\omega))^n \times (L^2(\omega))^n$.)

Remark.

1. Let $J(u) = \int_0^T \|u(t)\|_{\mathbb{R}^p}^2 dt$ be the transfer cost. Then for any $\omega \subset \Omega$, the regional gradient transfer cost in ω is smaller than the transfer cost in Ω .
2. The above definitions mean that we are only interested in the transfer of the system gradient to a desired function on the subregion $\omega \subset \Omega$.
3. If the system (1) is exactly gradient controllable in ω then it is weakly gradient controllable in ω .
4. For $\omega_2 \subset \omega_1$ the system (1) is exactly (resp. weakly) gradient controllable in ω_1 then it is exactly (resp. weakly) gradient controllable in ω_2 .

Proposition 1.

1. The system (1) is ω -exactly gradient controllable if and only if

$$Ker \chi_\omega + Im \tilde{\nabla} H = (L^2(\Omega))^n \times (L^2(\Omega))^n$$

2. The system (1) is ω -weakly gradient controllable if and only if

$$Ker \chi_\omega + \overline{Im \tilde{\nabla} H} = (L^2(\Omega))^n \times (L^2(\Omega))^n$$

Proof.

1. Let $y \in (L^2(\Omega))^n \times (L^2(\Omega))^n$ then $\chi_{\omega}y \in (L^2(\omega))^n \times (L^2(\omega))^n$ and since the system (1) is ω - exactly gradient controllable then there exist $u \in U$ such that $\chi_{\omega}y = \chi_{\omega} \tilde{V}Hu$. Let $y_1 = y - \tilde{V}Hu$ and $y_2 = \tilde{V}Hu$ then we have $y = y_1 + y_2$ with $y_1 \in Ker\chi_{\omega}$ and $y_2 \in Im\tilde{V}H$.

Conversely let $y \in (L^2(\omega))^n \times (L^2(\omega))^n$, then $\tilde{y} = \chi_{\omega}^*y \in (L^2(\Omega))^n \times (L^2(\Omega))^n$ which allows to write $\tilde{y} = y_1 + y_2$ with $y_1 \in Ker\chi_{\omega}$ and $y_2 \in Im\tilde{V}H$ consequently there exists $u \in U$ such that $y_2 = \tilde{V}Hu$ therefore $\tilde{y} = y_1 + \tilde{V}Hu$ which gives $y = \chi_{\omega} \tilde{V}Hu$ and thus the system (1) is ω -exactly gradient controllable.

2. Let $y \in (L^2(\Omega))^n \times (L^2(\Omega))^n$ then $\chi_{\omega}y \in (L^2(\omega))^n \times (L^2(\omega))^n$ and since the system (1) is ω - weakly gradient controllable then there exist $u_n \in U$ such that $\chi_{\omega}y = \lim \chi_{\omega} \tilde{V}Hu_n$ let $y_1 = y - y_2$ with $y_2 = \lim \tilde{V}Hu_n$ then we have $y = y_1 + y_2$ with $y_1 \in Ker\chi_{\omega}$ and $y_2 \in Im\tilde{V}H$.

Conversely let $y \in (L^2(\omega))^n \times (L^2(\omega))^n$, then $\tilde{y} = \chi_{\omega}^*y \in (L^2(\Omega))^n \times (L^2(\Omega))^n$ which allows to write $\tilde{y} = y_1 + y_2$ with $y_1 \in Ker\chi_{\omega}$ and $y_2 \in Im\tilde{V}H$ Consequently there exists $u_n \in U$ such that $y_2 = \lim \tilde{V}Hu_n$ therefore $\tilde{y} = y_1 + \lim \tilde{V}Hu_n$ which gives $y = \lim \chi_{\omega} \tilde{V}Hu_n$ and thus the system (1) is ω -weakly gradient controllable.

3 Gradient controllability and actuators

In this section we show that there exist a link between the regional gradient controllability and the actuators structure. Consider system (1) excited by p zone actuators (D_i, f_i) where $D_i \subset \Omega$ and $f_i \in H^1(D_i)$

$$\begin{cases} \frac{\partial^2 y(x,t)}{\partial t^2} - Ay(x,t) = \sum_{i=1}^p (\chi_{D_i} f_i)(x) u_i(t) & \text{in } Q \\ y(x,0) = 0, \frac{\partial y}{\partial t}(x,0) = 0 & \text{in } \Omega \\ \frac{\partial y(\xi,t)}{\partial \nu_A} = 0 & \text{on } \Sigma \end{cases} \quad (6)$$

Definition 2.

A sequence of the actuators is said to be gradient strategic if the excited system is weakly gradient controllable.

Proposition 2.

If the sequence of the actuators $(D_i, f_i)_{1 \leq i \leq p}$ is gradient strategic then

$$1. p \geq \sup(r_m).$$

2. Rank(G_m) = r_m , for all $m \geq 1$ where (G_m) is the matrix of order (p, r_m) given by

$$(G_m)_{i,j} = \begin{cases} \sum_{k=1}^n \langle \frac{\partial \omega_{mj}}{\partial x_k}, f_i \rangle_{D_i} & \text{zonal case} \\ \sum_{k=1}^n \frac{\partial \omega_{mj}}{\partial x_k} (b_i) & \text{pointwise case} \end{cases}$$

Proof.

The proof will be developed in the internal zonal case. The system (6) is weakly gradient controllable over $[0, T]$ then for all

$z = (z_1, z_2)$ in $(L^2(\Omega))^n \times (L^2(\Omega))^n$
 $\langle \tilde{V}Hu, z \rangle_{(L^2(\Omega))^n \times (L^2(\Omega))^n} = 0$, for all $u \in L^2(0, T; \mathbb{R}^p)$ and $T > 0 \implies z = 0$. Consider the following system:

$$\begin{cases} \frac{\partial^2 \varphi(x,t)}{\partial t^2} - A^* \varphi(x,t) = 0 & \text{in } Q \\ \varphi(x,T) = -h_0; \varphi'(x,T) = h_0 & \text{in } \Omega \\ \varphi(\xi,t) = 0 & \text{on } \Sigma \end{cases} \quad (7)$$

Multiplying the system (7) by $\frac{\partial y}{\partial x_k}$ and integrating over Q and using the green formula we obtain :

$$-\langle \frac{\partial y'}{\partial x_k}(T), \varphi(T) \rangle + \langle \frac{\partial y}{\partial x_k}(T), \varphi'(T) \rangle = \sum_{i=1}^p \int_0^T \langle f_i, \frac{\partial \varphi}{\partial x_k} \rangle u_i(t) dt$$

$$\text{then } \sum_{k=1}^n \langle \frac{\partial y'}{\partial x_k}, h_0 \rangle + \langle \frac{\partial y}{\partial x_k}, h_0 \rangle = \sum_{k=1}^n \sum_{i=1}^p \int_0^T \langle f_i, \frac{\partial \varphi}{\partial x_k} \rangle u_i(t) dt$$

$$\langle \tilde{V}Hu, (I, I) \rangle = \sum_{k=1}^n \sum_{i=1}^p \int_0^T \langle f_i, \frac{\partial \varphi}{\partial x_k} \rangle u_i(t) dt$$

with $I = \begin{pmatrix} h_0 \\ \cdot \\ \cdot \\ \cdot \\ h_0 \end{pmatrix}$ and therefore

$$\left[\begin{aligned} & \sum_{k=1}^n \sum_{i=1}^p \sum_{m=1}^{r_m} \int_0^T (-\lambda_m)^{\frac{1}{2}} \langle -h_0, \omega_{mj} \rangle \langle f_i, \frac{\partial \omega_{mj}}{\partial x_k} \rangle \sin((-\lambda_m)^{\frac{1}{2}}(\tau - T)) u_i(\tau) d\tau \\ & + \int_0^T \langle h_0, \omega_{mj} \rangle \langle \frac{\partial \omega_{mj}}{\partial x_k}, f_i \rangle \cos((-\lambda_m)^{\frac{1}{2}}(\tau - T)) u_i(\tau) d\tau \\ & = 0 \quad \forall u \in L^2(0, T; \mathbb{R}^p) \text{ and } T > 0 \end{aligned} \right]$$

$$\implies h_0 = 0$$

this amounts to:

$$\left[\begin{aligned} & \sum_m \left[(-\lambda_m)^{\frac{1}{2}} \sin(-\lambda_m)^{\frac{1}{2}}(\tau - T) \sum_{j=1}^{r_m} \sum_{k=1}^n \langle -h_0, w_{mj} \rangle \langle \frac{\partial \omega_{mj}}{\partial x_k}, f_i \rangle \right. \\ & \left. + \sum_m \cos(-\lambda_m)^{\frac{1}{2}}(\tau - T) \sum_{j=1}^{r_m} \sum_{k=1}^n \langle h_0, w_{mj} \rangle \langle \frac{\partial \omega_{mj}}{\partial x_k}, f_i \rangle = 0 \right] \\ & 1 \leq i \leq p \end{aligned} \right]$$

$$\implies h_0 = 0$$

for T large enough $\{ \cos(\cdot - T), \sin(\cdot - T) \}$ is an

orthonormal set of $L^2(0, T)$, then

$$\begin{cases} (-\lambda_m)^{\frac{1}{2}} \sum_{j=1}^{r_n} \sum_{k=1}^n \langle -h_0, \omega_{m_j} \rangle \langle \frac{\partial \omega_{m_j}}{\partial x_k}, f_i \rangle = 0 \\ \text{and} \\ \sum_{j=1}^{r_n} \sum_{k=1}^n \langle h_0, \omega_{m_j} \rangle \langle \frac{\partial \omega_{m_j}}{\partial x_k}, f_i \rangle = 0 \end{cases}$$

So

$$\sum_{j=1}^{r_n} \sum_{k=1}^n \langle h_0, \omega_{m_j} \rangle \langle \frac{\partial \omega_{m_j}}{\partial x_k}, f_i \rangle = 0 \Rightarrow h_0 = 0$$

which concludes the proof.

4 Regional target control

The propose of this section is to explore an approach devoted to the computation of the optimal control of the system (6) to a given gradient in the subregion ω . Suppose that $(g_p^d, g_s^d) \in \chi_\omega(Im(\nabla) \times Im(\nabla))$ is given and we set

$$\bar{G} = \{(\phi_0, \phi_1) \in D(\Omega) \times D(\Omega) \mid \phi_0 = \phi_1 = 0 \text{ sur } \Omega \setminus \omega\} \quad (8)$$

$$\bar{G}^n = \left\{ \begin{array}{l} (\tilde{\phi}_0, \tilde{\phi}_1) \in (D(\Omega))^n \times (D(\Omega))^n \mid (\tilde{\phi}_0, \tilde{\phi}_1) = \left(\begin{pmatrix} \phi_0 \\ \vdots \\ \phi_0 \end{pmatrix}, \begin{pmatrix} \phi_1 \\ \vdots \\ \phi_1 \end{pmatrix} \right) \\ \text{such that } (\phi_0, \phi_1) \in \bar{G} \end{array} \right\} \quad (9)$$

where $D(\Omega)$ is the space of test functions. The problem is a follows: Does there exist a control $u \in U$ with minimum-norm such that for $(y_0, y_1) \in D(A) \times H^1(\Omega)$ and $f \in H^1(D)$

$$\begin{cases} \frac{\partial^2 y(x,t)}{\partial t^2} - \Delta y(x,t) = (\chi_D f)(x)u(t) & \text{in } Q \\ y(x,0) = y_0(x), \frac{\partial y}{\partial t}(x,0) = y_1(x) & \text{in } \Omega \\ \frac{\partial y(\xi,t)}{\partial \nu} = 0 & \text{on } \Sigma \end{cases} \quad (10)$$

and the problem :

$$\begin{cases} \min_{u \in L^2(0,T)} J(u) = \|u\|_{L^2(0,T)}^2 \\ \chi_\omega(\nabla y_u(T), \nabla \frac{\partial y_u}{\partial t}(T)) = (g_p^d, g_s^d) \end{cases} \quad (11)$$

where (y_u) solution of (10)

4.1 HUM approach

The approach developed here is an extension of the Hilbert uniqueness method (HUM) developed by Lions (see[5])

For $(\phi_1, -\phi_0) \in \bar{G}$, the system

$$\begin{cases} \frac{\partial^2 \phi(x,t)}{\partial t^2} - \Delta \phi(x,t) = 0 & \text{in } Q \\ \phi(x,T) = \phi_0(x), \frac{\partial \phi}{\partial t}(x,T) = \phi_1(x) & \text{in } \Omega \\ \phi(\xi,t) = 0 & \text{on } \Sigma \end{cases} \quad (12)$$

Has a unique solution (see[5]).

In \bar{G}^n we define the following semi-norm :

$$\|(\tilde{\phi}_1, -\tilde{\phi}_0)\|_{\bar{G}^n} = \left(\int_0^T \left(\sum_{i=1}^n \langle \frac{\partial \phi(t)}{\partial x_i}, f \rangle_{L^2(D)} \right)^2 dt \right)^{\frac{1}{2}} \quad (13)$$

and we consider the system :

$$\begin{cases} \frac{\partial^2 \psi(x,t)}{\partial t^2} - \Delta \psi(x,t) = \sum_{i=1}^n \langle \frac{\partial \phi(t)}{\partial x_i}, f \rangle_{L^2(D)} (\chi_D f)(x) & \text{in } Q \\ \psi(x,0) = y_0(x), \frac{\partial \psi}{\partial t}(x,0) = y_1(x) & \text{in } \Omega \\ \frac{\partial \psi(\xi,t)}{\partial \nu} = 0 & \text{on } \Sigma \end{cases} \quad (14)$$

which has a unique solution such that

$$(\psi(T), \frac{\partial \psi}{\partial t}(T)) \in H^2(\Omega) \times H^1(\Omega) \text{ (see[2])}$$

and

$$(\psi(T), \frac{\partial \psi}{\partial t}(T)) = (\psi_0(T), \frac{\partial \psi_0}{\partial t}(T)) + (\psi_1(T), \frac{\partial \psi_1}{\partial t}(T)),$$

where ψ_0 and ψ_1 are solutions of the systems

$$\begin{cases} \frac{\partial^2 \psi_0(x,t)}{\partial t^2} - \Delta \psi_0(x,t) = 0 & \text{in } Q \\ \psi_0(x,0) = y_0(x), \frac{\partial \psi_0}{\partial t}(x,0) = y_1(x) & \text{in } \Omega \\ \frac{\partial \psi_0(\xi,t)}{\partial \nu} = 0 & \text{on } \Sigma \end{cases} \quad (15)$$

and

$$\begin{cases} \frac{\partial^2 \psi_1(x,t)}{\partial t^2} - \Delta \psi_1(x,t) = \sum_{i=1}^n \langle \frac{\partial \phi(t)}{\partial x_i}, f \rangle_{L^2(D)} (\chi_D f)(x) & \text{in } Q \\ \psi_1(x,0) = 0, \frac{\partial \psi_1}{\partial t}(x,0) = 0 & \text{in } \Omega \\ \frac{\partial \psi_1(\xi,t)}{\partial \nu} = 0 & \text{on } \Sigma \end{cases} \quad (16)$$

We consider the operator

$$\Lambda(\tilde{\phi}_1, -\tilde{\phi}_0) = \mathcal{P}(\nabla \psi_1(T), \nabla \psi_1'(T))$$

is a symmetric and bounded operator where $\mathcal{P} = \chi_\omega^* \chi_\omega$. Then the regional gradient controllability problem turns up to solve the equation :

$$\Lambda(\tilde{\phi}_1, -\tilde{\phi}_0) = -\mathcal{P}(\nabla \psi_0(T), \nabla \psi_0'(T)) + \chi_\omega^*(g_p^d, g_s^d) \quad (17)$$

and we have the following result:

Theorem 1. If the system (10) is ω - weakly gradient controllable then (17) has a unique solution (ϕ_0, ϕ_1) and

$$u^*(t) = \sum_{i=1}^n \langle \frac{\partial \phi(t)}{\partial x_i}, f \rangle_{L^2(D)} \text{ drives the system (10) to}$$



(g_p^d, g_s^d) on ω at time T , where ϕ is the solution of the system (12). Moreover, this control is the solution of the problem (11).

Proof.

Let $w_i(x)$ be the eigenfunctions of Δ associated with the eigenvalues λ_i . The mapping (13) defines a norm in \tilde{G}^n . Indeed

$$\|(\tilde{\phi}_1, -\tilde{\phi}_0)\|_{\tilde{G}^n} = 0 \text{ gives } \sum_{i=1}^n \langle \frac{\partial \phi}{\partial x_i}, f \rangle_{L^2(D)}^2 = 0 \text{ on } [0, T]$$

which is equivalent to

$$\sum_{j=1}^{\infty} \left(\langle \phi_0, w_j \rangle \cos[(-\lambda_j)^{\frac{1}{2}}(t-T)] + \frac{\langle \phi_1, w_j \rangle}{(-\lambda_j)^{\frac{1}{2}}} \sin[(-\lambda_j)^{\frac{1}{2}}(t-T)] \right) \sum_{i=1}^n \langle \frac{\partial w_j}{\partial x_i}, f \rangle_{L^2(D)} = 0 \tag{18}$$

thus, for T large enough, $\{\cos(\cdot - T), \sin(\cdot - T)\}$ is an orthonormal set of $L^2(0, T)$, then (18) gives

$$\langle \phi_0, w_j \rangle \sum_{i=1}^n \langle \frac{\partial w_j}{\partial x_i}, f \rangle_{L^2(D)} = 0$$

and

$$\langle \phi_1, w_j \rangle \sum_{i=1}^n \langle \frac{\partial w_j}{\partial x_i}, f \rangle_{L^2(D)} = 0$$

since (the system (10) is ω -weakly gradient controllable then $\sum_{i=1}^n \langle \frac{\partial w_j}{\partial x_i}, f \rangle_{L^2(D)} \neq 0$ and we have $\langle \phi_0, w_j \rangle = 0$ and $\langle \phi_1, w_j \rangle = 0, \forall i \geq 1$. It follows that $\phi_0 = \phi_1 = 0$ and (13) is a norm. Let \hat{G} be the completion of \tilde{G}^n by the norm (13) and \hat{G}^* its dual. We show that Λ is an isomorphism from \hat{G} into \hat{G}^* . Indeed

$$\langle \Lambda(\tilde{\phi}_1, -\tilde{\phi}_0), (\tilde{\phi}_1, -\tilde{\phi}_0) \rangle = \sum_{i=1}^n \left(\langle \frac{\partial \psi_1}{\partial x_i}(T), \phi_1 \rangle - \langle \frac{\partial \psi_1'}{\partial x_i}(T), \phi_0 \rangle \right)$$

multiplying (12) by $\frac{\partial \psi_1}{\partial x_i}$ and using of the Green formula we have.

$$\int_0^T \langle \frac{\partial \phi(t)}{\partial x_i}, f \rangle_{L^2(D)} \sum_{j=1}^n \langle \frac{\partial \phi}{\partial x_j}, f \rangle_{L^2(D)}^2 dt = \langle \frac{\partial \psi_1}{\partial x_i}(T), \phi_1 \rangle - \langle \frac{\partial \psi_1'}{\partial x_i}(T), \phi_0 \rangle$$

So we have $\langle \Lambda(\tilde{\phi}_1, -\tilde{\phi}_0), (\tilde{\phi}_1, -\tilde{\phi}_0) \rangle = \|(\tilde{\phi}_1, -\tilde{\phi}_0)\|_{\hat{G}}^2$. Hence, (17) has only one solution $(\tilde{\phi}_1, \tilde{\phi}_0)$ and $\sum_{i=1}^n \langle \frac{\partial \phi}{\partial x_i}, f \rangle_{L^2(D)}^2$ steers the system (10) to the desired gradient (g_p^d, g_s^d) on ω at time T . Now we consider $U_{ad} = \left\{ u \in U \mid \chi_\omega(\nabla y_u(T), \nabla \frac{\partial y_u}{\partial t}(T)) = (g_p^d, g_s^d) \right\}$.

For $v \in U_{ad}$ and under (11) we have

$$\begin{aligned} J'(u^*)(v - u^*) &= 2 \int_0^T u^*(t)(v(t) - u^*(t)) dt \\ &= 2 \int_0^T \sum_{i=1}^n \langle \frac{\partial \phi}{\partial x_i}, f \rangle_{L^2(D)}^2 (v(t) - u^*(t)) dt \end{aligned}$$

Applying Green's formula after multiplying (12) by $\frac{\partial (y_u - y_v)}{\partial x_i}$, and from the boundary and initial conditions we have :

$$\begin{aligned} \int_0^T \langle \frac{\partial \phi(t)}{\partial x_i}, f \rangle_{L^2(D)} (v(t) - u^*(t)) dt &= \langle \frac{\partial y_u}{\partial t}(T) - \frac{\partial y_v}{\partial t}(T), \frac{\partial \phi}{\partial x_i}(T) \rangle \\ &\quad - \langle \frac{\partial y_u}{\partial t}(0) - \frac{\partial y_v}{\partial t}(0), \frac{\partial \phi}{\partial x_i}(0) \rangle \\ &\quad + \langle y_u(0) - y_v(0), \frac{\partial \phi}{\partial x_i}(0) \rangle \\ &\quad - \langle y_u(T) - y_v(T), \frac{\partial \phi}{\partial x_i}(T) \rangle \end{aligned}$$

so $\int_0^T \sum_{i=1}^n \langle \frac{\partial \phi(t)}{\partial x_i}, f \rangle_{L^2(D)}^2 (v(t) - u^*(t)) dt = 0$ Hence, $J'(u^*)(v - u^*) = 0$.

The uniqueness of u^* comes from the strict convexity of J and establishes its optimality.

4.2 Numerical approach

In this section we give an approach which gives explicit formulae for $\tilde{\phi}_0, \phi_1$ and the optimal control solution of (11). We have seen that the problem (11) can be used to solve (17), which is equivalent to solving the minimization problem

$$\inf_{(\tilde{\phi}_1, \tilde{\phi}_0) \in \hat{G}} R(\tilde{\phi}_1, \tilde{\phi}_0) \tag{19}$$

where R is given by

$$\begin{aligned} R(\tilde{\phi}_1, \tilde{\phi}_0) &= \frac{1}{2} \int_0^T \left(\sum_{i=1}^n \langle \frac{\partial \phi}{\partial x_i}, f \rangle_{L^2(D)} \right)^2 dt + \sum_{i=1}^n \langle \frac{\partial \psi_0}{\partial x_i}(T), \phi_1 \rangle \\ &\quad - \langle \frac{\partial \psi_0'}{\partial x_i}(T), \phi_0 \rangle - \langle g_{p_i}^d, \phi_1 \rangle + \langle g_{s_i}^d, \phi_0 \rangle \end{aligned}$$

Expanding the integrand and letting $T \rightarrow +\infty$, we obtain:

$$\frac{1}{2T} \int_0^T \left(\sum_{i=1}^n \langle \frac{\partial \phi}{\partial x_i}, f \rangle_{L^2(D)} \right)^2 dt = \sum_{j=1}^{\infty} \frac{1}{4} (\langle \phi_0, w_j \rangle^2 - \frac{1}{\lambda_j} \langle \phi_0, w_j \rangle^2) \left(\sum_{i=1}^n \langle f, \frac{\partial w_j}{\partial x_i} \rangle_{L^2(D)} \right)^2 \tag{20}$$

Thus, for T large enough, we obtain :

$$\frac{1}{2} \int_0^T \left(\sum_{i=1}^n \langle \frac{\partial \phi}{\partial x_i}, f \rangle_{L^2(D)} \right)^2 dt \simeq \sum_{j=1}^{\infty} \frac{T}{4} (\langle \phi_0, w_j \rangle^2 - \frac{1}{\lambda_j} \langle \phi_0, w_j \rangle^2) \left(\sum_{i=1}^n \langle f, \frac{\partial w_j}{\partial x_i} \rangle_{L^2(D)} \right)^2 \tag{21}$$

The problem (19) can allow us to minimize the functional R given by :

$$\begin{aligned} R(\phi_0, \phi_1) &\simeq \sum_{j=1}^{\infty} \frac{T}{4} \langle \phi_0, w_j \rangle^2 \left(\sum_{i=1}^n \langle f, \frac{\partial w_j}{\partial x_i} \rangle_{L^2(D)} \right)^2 - \sum_{i=1}^n \langle \frac{\partial \psi_0'}{\partial x_i}(T), w_j \rangle \langle \phi_0, w_j \rangle \\ &\quad + \langle \phi_0, w_j \rangle \langle g_{s_i}^d, w_j \rangle \\ &\quad + \sum_{j=1}^{\infty} \frac{-T}{4\lambda_j} \langle \phi_1, w_j \rangle^2 \left(\sum_{i=1}^n \langle f, \frac{\partial w_j}{\partial x_i} \rangle_{L^2(D)} \right)^2 + \langle \frac{\partial \psi_0}{\partial x_i}(T), w_j \rangle \langle \phi_1, w_j \rangle \\ &\quad - \langle g_{p_i}^d, w_j \rangle \langle \phi_1, w_j \rangle \end{aligned} \tag{22}$$

The first term of (22) is independent of $\langle \frac{\partial \phi}{\partial t}(0), w_j \rangle$ and the second term is independent de $\langle \phi(0), w_j \rangle$. Hence we can minimize

$$\frac{T}{4} \langle \phi_0, w_j \rangle_\omega^2 \left(\sum_{i=1}^n \langle f, \frac{\partial w_j}{\partial x_i} \rangle_{L^2(D)} \right)^2 - \sum_{i=1}^n \langle \frac{\partial \psi_0'}{\partial x_i}(T), w_j \rangle \langle \phi_0, w_j \rangle_\omega + \langle \phi_0, w_j \rangle_\omega \langle g_{s_i}^d, w_j \rangle$$

and

$$-\frac{T}{4\lambda_j} \langle \phi_1, w_j \rangle_\omega^2 \left(\sum_{i=1}^n \langle f, \frac{\partial w_j}{\partial x_i} \rangle_{L^2(D)} \right)^2 + \sum_{i=1}^n \langle \frac{\partial \psi_0}{\partial x_i}(T), w_j \rangle \langle \phi_1, w_j \rangle_\omega - \langle g_{p_i}^d, w_j \rangle \langle \phi_1, w_j \rangle_\omega$$

which gives

$$\begin{cases} \langle \phi_0, w_j \rangle_\omega = \frac{2}{T} \frac{\sum_{i=1}^n (\langle \frac{\partial \psi_0}{\partial x_i}(T), w_j \rangle - \langle g_{s_i}^d, w_j \rangle)}{(\sum_{i=1}^n \langle f, \frac{\partial w_j}{\partial x_i} \rangle_{L^2(D)})^2} \\ \langle \phi_1, w_j \rangle_\omega = \frac{2\lambda_j}{T} \frac{\sum_{i=1}^n (\langle \frac{\partial \psi_0}{\partial x_i}(T), w_j \rangle - \langle g_{p_i}^d, w_j \rangle)}{(\sum_{i=1}^n \langle f, \frac{\partial w_j}{\partial x_i} \rangle_{L^2(D)})^2} \end{cases} \quad (23)$$

Then we obtain

$$\phi_0 = \begin{cases} \frac{2}{T} \sum_{j=1}^n \frac{\sum_{i=1}^n (\langle \frac{\partial \psi_0}{\partial x_i}(T), w_j \rangle - \langle g_{s_i}^d, w_j \rangle)}{(\sum_{i=1}^n \langle f, \frac{\partial w_j}{\partial x_i} \rangle_{L^2(D)})^2} w_j(x) & x \in \omega \\ 0 & x \in \Omega \setminus \omega \end{cases} \quad (24)$$

and

$$\phi_1 = \begin{cases} \frac{2}{T} \sum_{j=1}^n \lambda_j \frac{\sum_{i=1}^n (\langle \frac{\partial \psi_0}{\partial x_i}(T), w_j \rangle - \langle g_{p_i}^d, w_j \rangle)}{(\sum_{i=1}^n \langle f, \frac{\partial w_j}{\partial x_i} \rangle_{L^2(D)})^2} w_j(x) & x \in \omega \\ 0 & x \in \Omega \setminus \omega \end{cases} \quad (25)$$

and the optimal control which steers the system (11) to the desired gradient (g_p^d, g_s^d) in ω at time T is given by

$$u^*(t) = \sum_{i=1}^{+\infty} [\langle \phi_0, w_i \rangle \cos(\sqrt{-\lambda_i}(t-T)) + \frac{\langle \phi_1, w_i \rangle}{\sqrt{-\lambda_i}} \sin(\sqrt{-\lambda_i}(t-T))] \langle \sum_{i=1}^n \frac{\partial w_i}{\partial x_i}, f \rangle_{L^2(D)} \quad (26)$$

We define a final error (depending on the subregion ω and the location of the actuator) by considering $\mathcal{E} = \|\nabla y_u(T) - g_p^d\|_{(L^2(\omega))^n}^2 + \|\nabla y_u(T) - g_s^d\|_{(L^2(\omega))^n}^2$. ϕ_0, ϕ_1 and u^* are given by (24), (25) and (26). The general algorithm for computing the optimal control for (10) is as follows.

Algorithm

1. Choose actuator location $D \subset \Omega$, the subregion ω and precision ϵ .
2. Choose approximation order M .
3. Calculation of ϕ_0 and ϕ_1 using (24), (25) and u^* from (26).
4. Solve (12) and obtaining $\nabla y_u(T)$ and $\nabla y_u'(T)$.
5. If $\mathcal{E} \leq \epsilon$ stop, else $M \leftarrow M + 1$ and return to step 3.

5 Simulation results

Here we consider one-dimensional system excited by one internal pointwise actuator

$$\begin{cases} \frac{\partial^2 y(x,t)}{\partial t^2} - \frac{\partial^2 y(x,t)}{\partial x^2} = \delta(x-b)u(t) & \text{in }]0, 1[\times]0, T[\\ y(x,0) = y_0(x), \quad \frac{\partial y}{\partial t}(x,0) = y_1(x) & \text{in }]0, 1[\\ y(0,t) = y(1,t) = 0 & \text{on }]0, T[. \end{cases} \quad (27)$$

Because of linearity of the above system, we take $y_0(x) = y_1(x) = 0$.

For $T = 2$ and $b=0.23$, we have the following results:

5.1 Example 1

Here we test the previous algorithm with the desired gradient position and speed gradient given by

$$\begin{cases} g_p^d(x) = 2 \sin(\pi x) / (x^4 + 1) \\ g_s^d(x) = 8 \sin(\pi x) x^2 \end{cases}$$

Global target

For $\omega =]0, 1[$ we have the figures:

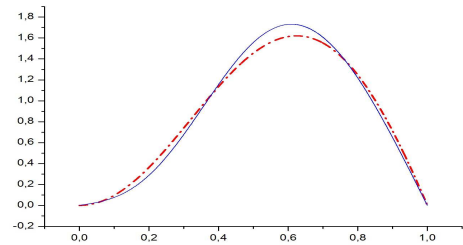


Figure 1: The desired position gradient g_p^d (dashed line) and its reached (solid line) in ω .

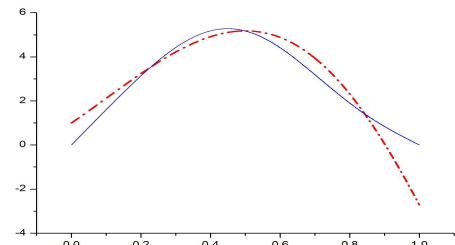


Figure 2: The desired speed gradient g_s^d (dashed line) and its reached (solid line) in ω .

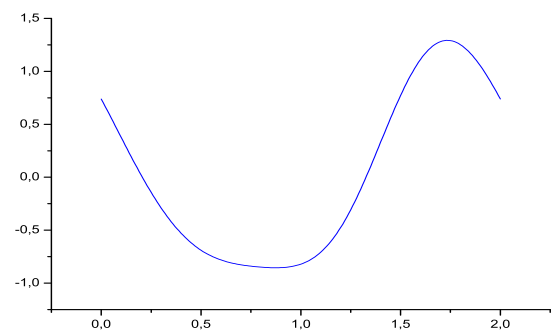


Figure 3: The evolution of the control function.

Regional target

For $\omega =]0.3, 0.5[$, we have the following figures

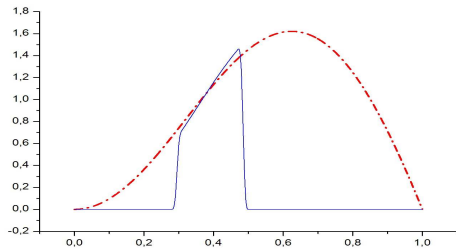


Figure 4: The desired position gradient g_p^d (dashed line) and its reached (solid line) in ω .

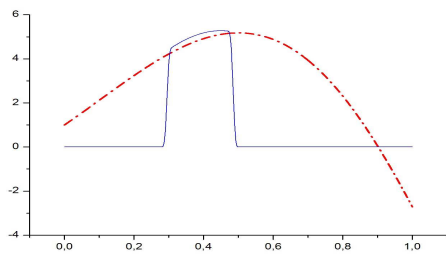


Figure 5: The desired speed gradient g_s^d (dashed line) and its reached (solid line) in ω

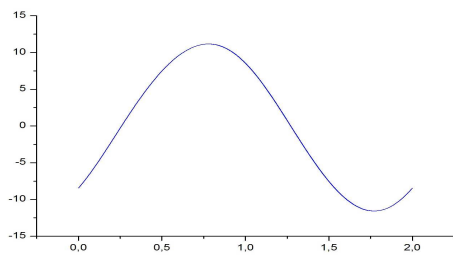


Figure 6: The evolution of the control function.

Fig 4 and Fig 5 show that the reached position gradient (resp. speed gradient) is very close to the desired gradient position (resp. gradient speed) in ω . The reached state gradient and speed gradient are obtained with the error $\varepsilon = 2.7631 \times 10^{-3}$ and the cost $J(u^*) = 2.32 \times 10^{-1}$.

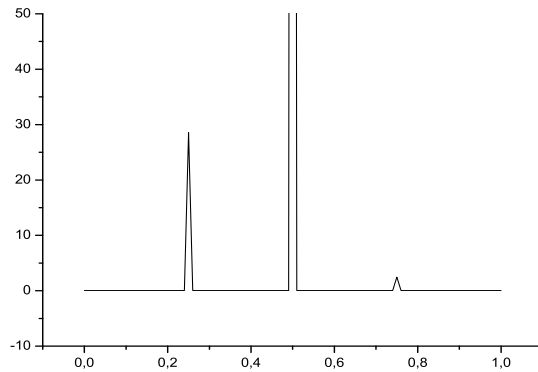


Figure 7: The reconstruction error with respect to the actuator location.

The following simulation results show the evolution of the reconstruction error with respect to the actuator location b in $]0, 1[$.

Figure 7 reveals the following facts:

- For a given subregion ω , there is an optimal actuator location (optimal in the sense that it leads to a desired state gradient very close to the reached one).
- When an actuator is located sufficiently far from the subregion ω , the reconstructed gradient error is constant for any locations

Relation between the subregion area and reconstruction error

Here we study the evolution of the reconstruction error with respect to the subregion area.

Table 1: Evolution of the error with respect to the subregion area.

subregion	Reconstruction error
$]0.1, 0.9[$	4.0005×10^{-3}
$]0.1, 0.8[$	3.7310×10^{-3}
$]0.1, 0.7[$	3.6562×10^{-3}
$]0.2, 0.7[$	3.3631×10^{-3}
$]0.3, 0.6[$	2.7631×10^{-3}
$]0.3, 0.5[$	1.2693×10^{-4}
$]0.3, 0.4[$	1.0971×10^{-5}

We note that the reconstruction error depends on the area of the subregion. Its means that the greater the area is the greater the error is.

5.2 Example2

Here the considered position and speed gradient are given by

$$\begin{cases} g_p^d(x) = \pi \sin(\pi x) \tan(x) \\ g_s^d(x) = (\pi \sin(\pi x) + \cos(\pi x)) \exp(x) \end{cases}$$

Global target

For $\omega =]0, 1[$ we have the figures:

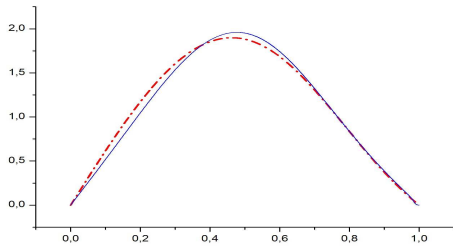


Figure 8: The desired position gradient g_p^d (dashed line) and its reached (solid line) in ω .

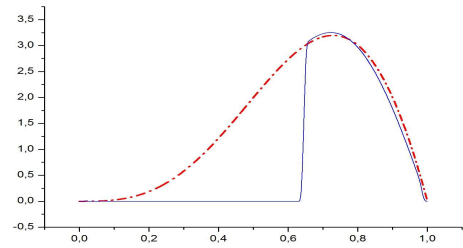


Figure 12: The desired speed gradient $\frac{\partial y'(T)}{\partial x}$ (dashed line) and its reached (solid line) in ω .

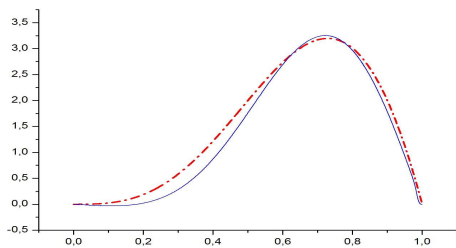


Figure 9: The desired speed gradient g_s^d (dashed line) and its reached (solid line) in ω .

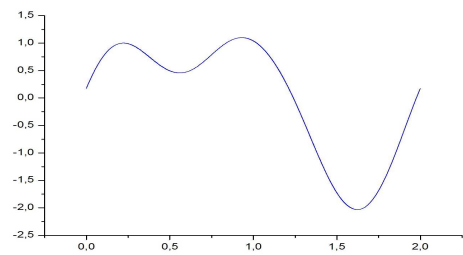


Figure 13: The evolution of the control function.

Figures 11 and 12 show that the reached position gradient (resp. speed gradient) is very close to the desired gradient position (resp. gradient speed) in ω . The reached state and speed gradient are obtained with the error $\varepsilon = 5.1419 \times 10^{-3}$ and the cost $J(u^*) = 3.17 \times 10^{-1}$

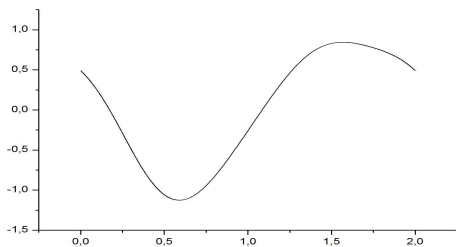


Figure 10: The evolution of the control function.

Regional target

For $\omega \in]0.65, 1[$, we have the following figures

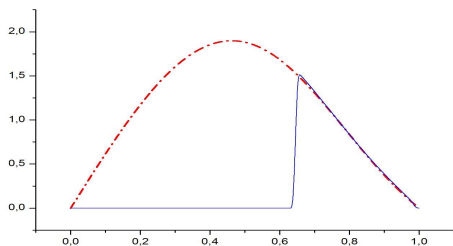


Figure 11: The desired position gradient g_p^d (dashed line) and its reached (solid line) in ω .

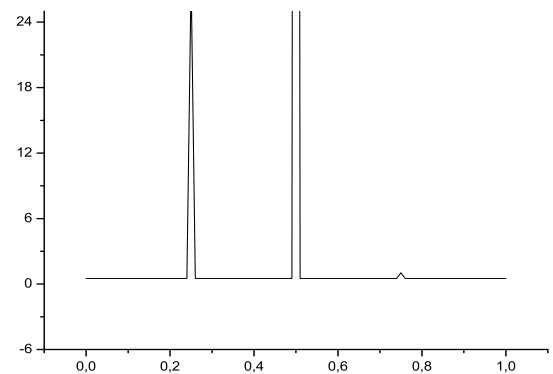


Figure 14: The reconstruction error with respect to the actuator location.

In this example, we examined the evolution of the reconstruction error, with respect to the actuator location, we obtained similar conclusion as in the example 1.

6 Conclusion

In this work we have extended the notion of regional gradient controllability to hyperbolic systems. We gave

definitions and important characterizations in connection with strategic actuator and which allowed as to extend the HUM approach and then achieve the desired gradient. A minimization problem is also considered which provided us an algorithm with explicit formula of the optimal control that is performed through numerical examples and simulations. The problem where the subregion target is a part of the boundary of the system evolution domain, is of great interest and the work is under consideration and will be the subject of the feature paper. We are also interested to control the gradient of semilinear systems which are very close to nonlinear ones, and then we try to extend the existed results given in observability (see[8]and[9]) and controllability (see[10]) of semilinear systems to gradient case.

References

- [1] E. Zerrik, H. Bourray and S. Ben Hadid, 2010 Sensors and boundary state reconstruction of hyperbolic systems, *Int. J. Appl. Math. Comput. Sci.*, **20**, 227-238 (2010).
- [2] J. L. Lions, E. Magenes, , *Problèmes aux limites non homogènes et applications.*, **1**, (1968).
- [3] R. F. Curtain and H. Zwart, *An introduction to infinite dimensional linear systems theory*, Springer Verlag, NewYork, (1995).
- [4] A. El Jai and A.J Prichard, *Sensors and actuators in distributed systems analysis, Ellis Horwood series in applied mathematics*, J. Wiley., (1988).
- [5] J. L. Lions, *Contrôlabilité exacte perturbation et stabilisation des systèmes distribués non homogènes et applications*. Tome 1, Masson, (1988).
- [6] E. Zerrik and R. Larhrissi, *Regional target control of the wave equation*, *Int. J. Systems Science*, **32**, 1233-1242 (2001).
- [7] E. Zerrik and A. Boutoulout and A. Kamal, *Regional gradient controllability of parabolic systems*, *Int. J. appl. Math and Comp. Sci.*, **9**, 767-787 (1999).
- [8] A. Boutoulout, H. Bourray and F. El Alaoui, *Boundary gradient observability for semilinear parabolic systems: Sectorial approach*, *Math. Sci. Lett.*, **2**, 45-53 (2013).
- [9] A. Boutoulout, H. Bourray and F. El Alaoui, *Boundary flux reconstruction for semilinear parabolic systems: HUM Approach*, *International Review of Automatic Control (I.R.E.A.CO.)*, **5**, 652-659 (2012).
- [10] A. Kamal, A. Boutoulout and S. A Ould Beinane, *Regianl boundary controllabiity of semilinear distributed parabolic systems*, *International Review of Automatic Control(I.R.E.A.CO.)*, **3**, 378-387 (2010).



Hamid Bourray is a professor at the University Moulay Ismail of Meknes in Morocco. He is an assistant professor at the same University. He got his Doctorat in Systems Analysis (2002) at the Faculty of Sciences in Meknes. Professor Bourray has published many paper in the area of system analysis and control. He is a researcher at STI Team, Macs Laboratory at the University Moulay Ismail of Meknes in Morocco.



Ali Boutoulout is a professor at the University Moulay Ismail of Meknes in Morocco. He obtained his Doctorat d'Etat in System Regional Analysis (2000) at University Moulay Ismail. Professor Boutoulout has published many paper in the area of system analysis and control. Now he is the head of the research team STI (System Theory and Informatics) and a director of Master System Theory and Informatics, in department of Mathematics and Informatics of Faculty of Sciences at the University Moulay Ismail of Meknes in Morocco.



Imad Harraki is a researcher, preparing his Doctorat in Applied Mathematics at the University Moulay Ismail of Meknes in Morocco. His research area is focused on analysis and control of distributed systems and numerical analysis. At present he is a searcher at STI Team, Macs Laboratory at University Moulay Iamail of Meknes, Morocco.