Experiential Learning in Computer Engineering using Medium Complexity Logic Design Circuits

Omer alkelany

Follow this and additional works at: https://digitalcommons.aaru.edu.jo/erjeng

Experiential Learning in Computer Engineering using Medium Complexity Logic Design Circuits

Omer Alkelany[1]

[1]Acting Vice Dean for Graduate Studies, and Scientific Research, Horus University- Egypt – email: oalkelany@horus.edu.eg

Abstract- One of the main tracks of research is about Low-cost computing devices in engineering educations. This track faces the problem that conventional methods are either too trivial demonstrative educational examples, or too abstracted that it hides away the necessary details students should learn, or too complex industry grade demonstrations. This research targets to utilize lost cost computing devices, and produce medium complexity educational component using analog to digital, digital to analogy circuits integrated with Field Programmable Gate Array (FPGA) devices. A medium level complexity example is illustrated in this paper using Analog to Digital and Digital to Analog converter board attached to FPGA development board. A comparison between conventional methods and proposed methods is also presented showing advantages of FPGA based logic design implementations.

Keywords- Higher education enhancement, Technology in education, Field Programmable Gate Arrays (FPGA)s, Prototype Laboratory development. Analog to Digital and Digital to Analog conversions.

I. INTRODUCTION

Data acquisition systems (DAQ) have broad applications in industrial control systems, medical diagnosis field, and even in educational institutions. These DAQ systems are used to sample analog signals, convert them to digital forms, process them digitally, store them, and most of the time we need also to convert results back to analog forms [1,2]. According to Nyquist-Shannon sampling theorem, a signal with maximum frequency component of f Hz, must be sampled with a sampling frequency of at least $2f$ Hz [1]. In sophisticated data acquisition system applications such as in [2-7], input channels are not of similar characteristics unlike most signal processing algorithms which make the assumption that samples of a signal are equally spaced.

Since Field Programmable Gate Arrays, were introduced in 1985 by Xilinx [8], it has become a very mature technology, especially it was patented in 1992. Its market share today is in the billions of US dollars. FPGAs are based on fundamental ideas of the use of memory cells to connect wires as desired, specify logic functions in a reconfigurable fashion, and even to specify the mode of operation of most of the pins of the integrated circuit [9].

Figure 1 shows an example of a Configurable Logic Block CLB of 4 inputs, and two 3-input LUTs, Full-Adder (FA), sequential D-type flip flop (DFF), multiplexers (MUX) with select lines. One of the MUXs select lines is connected to the input d of the CLB, while the other is connected to the CLB sequential/combinational configuration choice to use or bypass the DFF correspondingly.

Figure 2 shows an example of a typical FPGA, with an array of CLBs, and reconfigurable interconnection wires. The modules of General-Purpose Input/Outputs (GPIO) are also of paramount importance, since they configure the mode of each of the pins of the chip to be input, output, bidirectional, buffered, etc. Modern FPGAs are based on the same concept, but they may also offer non-reconfigurable components, such as memory cells, microprocessors, input/output transceivers, and so on. Figure 3 shows how a logic circuit can be modeled in different ways, and eventually be described in hardware description language (HDL) as a mean to implement it in FPGA.

Logic circuit designers are also equipped with sophisticated design tools, which make the FPGA a feasible choice for implementing, testing, evaluating multitude of integrated circuit components. Furthermore, FPGA technology allows designers to use already fabricated integrated circuits to implant logic circuits and changed them later. Thus, FPGAs become a perfect technology for educators who are involved in reconfigurable hardware design courses.

II. CHALLENGES OF DAQ SYSTEMS

To sample multiple signals simultaneously, it is possible to purchase multiple single-channel DAQs, but this is usually an expensive approach. Thus, a multi-channel DAQ can be used instead. Consequently, one DAQ can process the data for multiple channels at once, leading to a lower cost.

Conventional multi-channel DAQs [2-7] make use of a simple sampling technique called Round-robin to time-multiplex the sampling of all connected signals. When using the Round-robin sampling technique, the minimum sampling frequency of any channel is limited by the minimum required sampling frequency of the highest frequency input signal. If the input signals contain a heterogeneous mix of both high frequency and low frequency signals, the low frequency signals are oversampled. This results in redundant data and uses up ADC resources that could be used to sample additional signals. Various research has been done to resolve some of the disadvantages of conventional DAQs, particularly in its time schedule to sample multiple channels [2-7, 10-26]. For example, non-uniform sampling techniques tries to relax the constraint of a uniform interval for sampling. The Weighted
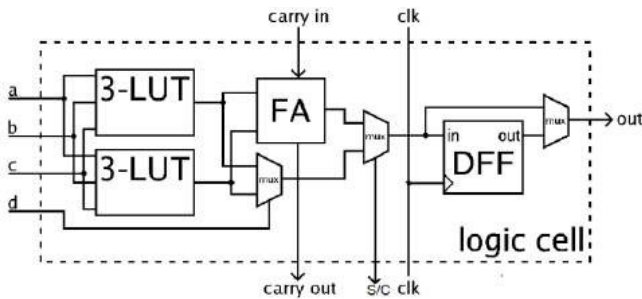
Figure 1: Example Configurable Logic Block of a generic FPGA

Periodic None-uniform Sampling (WPNS) [10-11], estimates the frequency spectrum of a signal that has a highest bandwidth, and cycles through a list of processes and allocates multiple blocks of time to each process for its continuous execution behavior based on its priority.

Most of existing solutions to DAQs used either simulation results, or were implemented on Very Large Scale Integrated (VLSI) circuits. Both options are not optimal for learning. Simulation only abstracts away physical details (i.e., in simulations only), or hinders the ability of hardware reconfiguration (i.e., VLSI technology). Thus, the author believes that the introduction of Analog to Digital, Digital to Analogy conversion with a reconfigurable integrated circuit technology could be used to alleviate these disadvantages. Of a Some of latest research work used FPGA in DAQ systems such as in [27-46]. For clarity, and completeness purposes, the following figures show fundamental basics of FPGA, with an example of a multiplexor circuit.

Instructors using Experiential learning need to only show directions of how to accomplish a task, and not giving the learners all the details of how to take the route to the desired
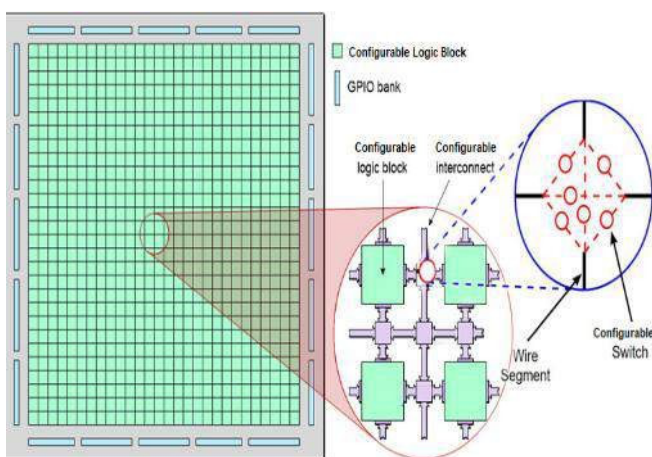
destination [47]. Thus, it makes learning an experience (i.e., not just perform an experiment) that moves beyond the classroom instruction and allows students the opportunity to draw conclusions, and being more involved in their own learning process.

Experiential Learning is thus considered as Learning by reflection on Doing [48-56]. It is not a new concept, and various philosophers stressed it in their teachings. It was conceptualized by Aristotle about Ethics as "for the things we have to learn before we can do them, we learn by doing them (first!)" [57]. However, in the 1970s, David A. Kolb developed a fundamental modern model of experiential learning [58]. According to Kolb, [59-60] the learner must be actively involved in the experience; reflect on the experience; analyze the outcomes; and perform decision making and problem-solving skills in order to use the new ideas gained from the prior experience. In this process, instructors to give constructive feedback to the learners, but they should not rush to provide the answer [61-62], especially when creative abilities are to be developed (critical thinking, design, synthesis, etc.), and particularly when there is not a single right answer. They will use their experience to judge or evaluate an outcome of a targeted component and share it with the learners [63-64].

Experiential learning was used in different fields of engineering education. For example [65], it was used via hardware emulators, and FPGA were used in latter stage of complex multi-part designs. Also, in 2020, two different comparative studies for experiential learning were done in two different universities in China, and New Zealand considering virtual reality applications, concluded that it enhances learning experience [66-68]. Furthermore, researchers investigated the incorporation of experiential learning at a Canadian university, in 2017, but they implemented it in a single engineering course, without FPGAs, and thus results
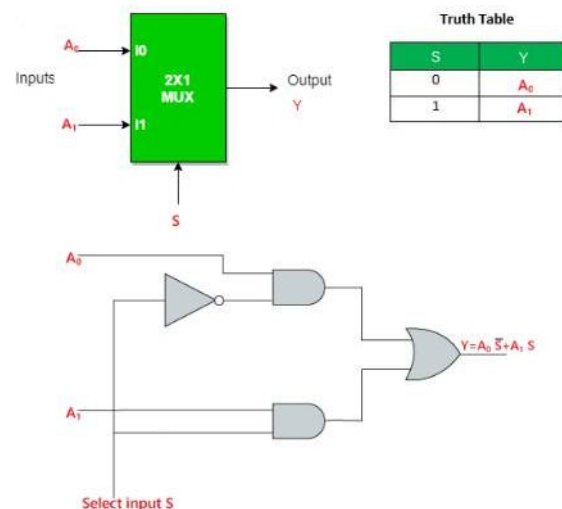

Figure 2: Illustration of a typical FPGA, with an array of CLBs, and reconfigurable interconnection wires via configurable switches

Figure 3: A two to one Multiplexer: Block diagram, truth table, and logic circuit

were limited [69]. Recently, a research team in Horus University-Egypt adopted the use of FPGAs in experiential learning [27-29].

III. EXPERIENTIAL LEARNING VIA A BASIC LOGIC DESIGN EXAMPLE USING ADVANCED FPGA BOARD

The author founded the Experiential Learning Research Lab in the Faculty of Engineering at Horus University-Egypt

Figure 4: The Experiential Learning Research Lab (EXL-Research) showing multiple stations

via funds made available both internally and externally. Figure 4 shows an angle of this lab, where stations are set to design different students experiences. [27, 28, 29]

Of the acquired boards, is the Altera Cyclone II (2C70) DE2-70 [70], FPGA board, shown in Figure 5. We attached the ADA board [71] to the GPIO connections on the DE2-70, as shown in Figure 6. Then we configured the FPGA to operate as an interface for the A/D converter board, generate a digital approximation to sine wave with its D/A converter, connect the output to an analog input channel, then acquire it back via the A/D converter for testing purposes. We used an

analog input of the A/D converter input. Then we used a logic analyzer on the FPGA design tool to verify that conversion process.
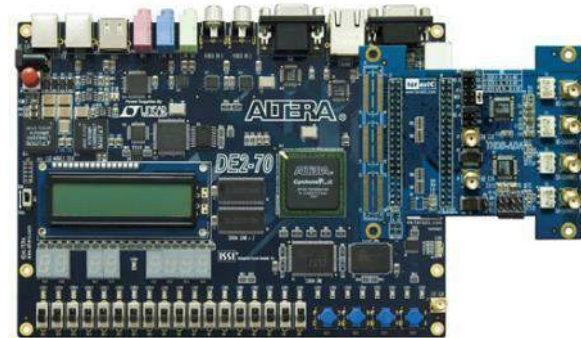
Figure 6: Altera DE2-70 board, with the A/D converter card

Figure 7: Experimental setup for the Altera DE2-70 board, with the A/D converter card

To initially verify the conversion process, we used the Quartus II FPGA development tool to load an on-chip logic analyzer component. As shown in Figure 8, we observe that the D/A output is made to generate a sine wave, which was connected to the A/D input, where its output is shown at the top of the graph. Figures 7, and 8 show the graphical and text output of such conversion process respectively.
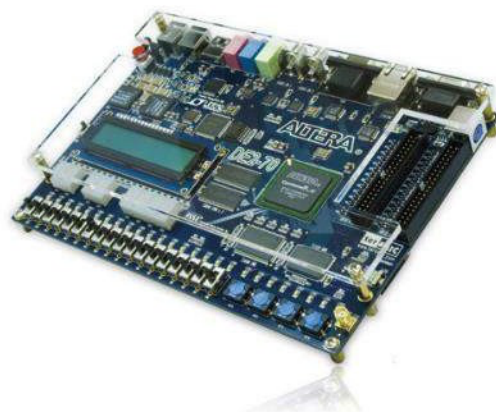
Figure 5: Altera DE2-70 board

Figure 7: Logic Analyzer graphical output for the Altera DE2-70 board, with the A/D converter card

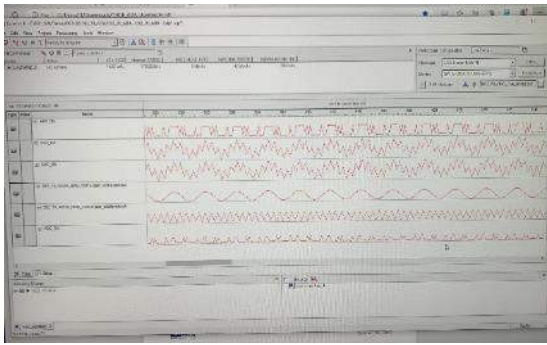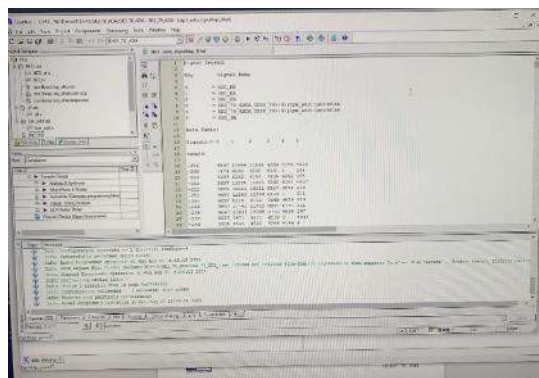**Figure 8: Logic Analyzer text output for the Altera DE2-70**

Based on a Cyclone II FPGA board, the instructor may further challenge the students by projects of high complexities. Examples include time using multiple channels at once, downloading data to computer for further processing, and so on. Thus, students will need to use more capabilities of the FPGA design tools. Also, for advanced courses, the same project can be extended to send the outputs to a network interface, thus using a web browser, and a microprocessor on the FPGA chip and so on. In those later experiences, students will need to learn more about Hardware Description Languages (HDL), such as Verilog or VHDL together with Schematic editors, in-chip logic analyzers, functional simulations, and timing simulations.

IV.   FPGA BASED EXPERIENTIAL LEARNING COMPARISON WITH CONVENTIONAL METHODS

Conventual ways to implement basic logic circuits include:
- Logic simulation
- Discrete component implementations
- Ready off-the-shelf logic blocks

   Int the following we list advantages and disadvantages of these choices as they compare with

- Modern, FPGA based logic circuit implementations

   Logic simulation: This is typically a computer based simulation of the logic circuits (such as LogiSim, ModelSim, etc). Although very useful to illustrate

teaching concepts, but they fail to give the necessary physical experiences, and students may still find it not convincing that their design will actually work.

Discrete component implementations: This is straight forward buy, and try approach. Usually, students are asked to acquire parts on their own, and build the circuit. Most of the time, due to lack of prior experiences, students break many parts, and may get frustrated from having to buy more parts to replace failed ones. Also, it requires a very thorough attention to details of all wirings, which can be sometimes too time consuming and also frustrating.

Ready off-the-shelf logic blocks: This tries to remedy the problems of previous choice, but for its simplicity, fails to give the student the proper hardware experiences of industrial implementation technology.

Furthermore, none of the implementation methods used above are actually used in the computer logic design industry today.

FPGA technologies have reached a maturity level that is used in industry and can be also used in multi level (i.e., basic to complex) design circuits.

V.   CONCLUSIONS AND FUTURE WORK

In this paper, we presented a medium-level design experience using FPGA DE2-70 board, and A/D, D/A converter board for the experiential learning pedagogy. Detailed step by step illustrations were give, so that instructors can use it to duplicate the experiences and benefit from them. Furthermore, we compared such developed experiences with conventual methods, showing that experience learning, even in its basic form resolves the problems found in traditional teaching.

In future work, further computer-based analysis will be done. To do so, A/D converter acquired data must be downloaded to the computer and analyzed via Matlab to compare the acquired data with an synthesized sine wave. We can use auto-correlation function to measure the mean-square error of the between the synthesized wave, and the acquired wave.

VI. ACKNOWLEDGMENT:

Conflicts of Interest:

All authors declare that they have no conflict of interest regarding this research paper and that they comply with research ethics.

REFERENCES

[1] James B. Tsui, "Analog-to-Digital Converters," Book Chapter, Digital Techniques for Wideband Receivers, p. 155-217, IET Digital Library, 2004.

[2] Somappa, Laxmeesha, Baghini, Maryam Shojaei, "Continuous-Time Hybrid Delta Sigma Modulators for Sub-mu W Power Multichannel Biomedical Applications," IEEE Transactions on Very Large Scale Integration (VLSI) Systems,

[3] DOI 10.1109/TVLSI.2022.3140222, 2022.

[4] Moon, Jim Visser, Henk Hunt, Robert Kenneth McCombie, Devin Dhillon, Marshal Singh Banet, Matthew J., "Body-worn vital sign monitor," USA Patent US-11096596, 2021.

[5] Ryu, Jae-young, Kim, Dong-ki, Kim, Young-hwan, Seo, Min-woo, Lee, Jei-young, "Ultrasound diagnosis apparatus for self- diagnosis and remote-diagnosis, and method of operating the ultrasound diagnosis apparatus," USA Patent US- 11123041, 2021.

[6] Banet, Matthew, Pede, Susan Meeks Dhillon, Marshal Singh Hunt, Kenneth Robert, "Body-worn sensor for characterizing patients with heart failure," USA Patent US- 11129537, 2021.

[7] Islam, Mohammed N., "Multi-wavelength wearable device for non-invasive blood measurements in tissue," USA Patent US-11160455, 2021.

[8] -, "FPGA Design – A Brief History," July, 18th, 2010, https://www.enventure.com/blog/fpga-design-a-brief-history/, accessed August, 2023.

[9] Kevin Wible, "What is an FPGA and how does it Work?," https://www.cardinalpeak.com/blog/curious-about-what-an-fpga-is-and-how-it-actually-works, accessed August, 2023.

[10] G. Minas and J. G. Rocha, "Sigma-Delta Analog to Digital Converter for use in Lab-on-a-Chip Devices for Biochemical Clinical Analyses," ECS Transactions. 4 171, 2007.

[11] B. M. J. Z. Dongdong Qu, "Optimal Weighted Periodic Nonuniform Sampling Sequences for Digital Alias-free Signal Processing," IEEE 10th International Conference in Signal Processing (ICSP), Dalian, 2010.

[12] J. Wu, J.-C. Liu, and W. Zhao, "Utilization-Bound Based Schedulability Analysis of Weighted Round Robin Schedulers," Real-Time Systems Symposium, pp. 435,436, 2007 Dec 2007.

[13] Masatosi Imori "Real Time Event Selection and Flash Analog-to-Digital Converters", Japanese Journal of Applied Physics. 22 1427, 1983.

[14] Niu Guangshan, Liu Cong, Zhang Jianwei, Li Xuetao, Luo Xiangdong,"Research progress of time-interleaved analog-to-digital converters," Integration, Volume 81, Pages 313-321, ISSN 0167-9260,

[15] https://doi.org/10.1016/j.vlsi.2021.08.007, 2021.

[16] D'Arco, Mauro, Napoli, Ettore, Zacharelos, Efstratios, Angrisani, Leopoldo, Strollo, Antonio Giuseppe Maria, "Enabling Fine Sample Rate Settings in DSOs with Time-Interleaved ADCs," Sensors, Volume22, Issue1, DOI10.3390/s22010234, 2021.

[17] D. Petrinovic, "High efficiency multiplexing scheme for multi-channel A/D conversion," Midwest symposium on circuits and systems, pp. 534-537, 1998.

[18] Luengo-Garcia, David, Pantaleon-Peieto, Carlos, Santamaria Caballero, Jgnacio, Jesus, Ibanex Diaz, and Gomez-Cosio, Enrique. "Simultaneous Sampling by Digital Phase Correction," IEEE Instrumentation and Measurement, 1997.

[19] R. R. M. Meurer, "Enhancement of Multichannel A/D Conversion by a Code Division Multiplex Approach," IEEE 6th International Symposium, 2000.

[20] J. W. L. C. L. Liu, "Scheduling Algorithms for Multiprogramming in a Hard-Real- Time Environment," Journal of the ACM, vol. 20, no. 1, pp. 46-61, 1973.

[21] K. K. Khramov and V. V. Romashov, "Operational modes of high-speed DACs: analysis and mathematical modeling" Journal of Physics: Conference. Series. 1096 012158, 2018.

[22] V. V. Romashov et al, "Application high-speed digital-to-analog converters for direct digital synthesis of high-frequency radio signals," Journal of Physics: Conference. Series. 1632 012023, 2020.

[23] Adimulam, Mahesh Kumar, Srinivas, M. B., "A 12-bit, 1.1-GS/s, Low-Power Flash ADC," IEEE Transactions on Very Large Scale Integration (VLSI) Systems, DOI10.1109/TVLSI.2021.3138538, 2022.

[24] Li, Xing, Zhou, Lei, "A survey of high-speed high-resolution current steering DACs," Journal of Semiconductors, 41 111404, 2020.

[25] Saeed, MaryamWang, Qingyuan Martens, Olev Larras, Benoit Frappe, Antoine Cardiff, Barry Deepu, John, "Evaluation of Level-Crossing ADCs for Event-Driven ECG Classification," IEEE transactions on biomedical circuits and systems, DOI10.1109/TBCAS.2021.3136206, 2021.

[26] Chen, Dongdong Cui, Xinhui Zhang, Qidong Li, Di Cheng, Wenyang Fei, Chunlong Yang, Yintang, "A Survey on Analog-to-Digital Converter Integrated Circuits for Miniaturized High Resolution Ultrasonic Imaging System," Journal of Micromachines, Volume13, Issue1, DOI10.3390/mi13010114, 2022.

[27] Omer Alkelany, Hatem Khater, Mohamed Kamal, Hosam E. Mostafa, "Preliminary Evaluation of Experiential Learning in Engineering Pedagogy for Undergraduate Students Learning Logic Design Concepts" Proceedings of the First International Conference on Engineering Solutions toward Sustainable Development (ESSD-2023).

[28] Omer Alkelany, Hatem Khater, Mohamed Kamal, Hosam E. Mostafa, "Survey and Evaluation of Applied Modern Engineering Pedagogy" Proceedings of the First International Conference on Engineering Solutions toward Sustainable Development (ESSD-2023).

[29] Omer Alkelany, "Analysis of the Time Multiplexed Sampling and a Proposed Prototype for Effective Heterogenous Data Acquisition Systems" to the First International Conference on Engineering Solutions toward Sustainable Development (ESSD-2023).

[30] Omer Alkelany, "Simultaneous Time Sampling in Heterogenous Multi-channel Data Acquisition", 4th ICEST International Conference on Engineering Science and Technology, Luxor, Egypt, February 16th – 17th, 2022.

[31] O. Alkelany, "Simultaneous Time Sampling for Heterogenous Multichannel Data Acquisition," International Journal of Advanced Scientific Research and Innovation. VOLUME 4, ISSUE 2, 2021, pp 39 – 52. ISSN: 2785-9541, 2021

[32] Omer Alkelany Mohamed Abdelrahman, "A Multi-Level Curriculum in Digital Instrumentation and Control based on Field Programmable Gate Array Technology, "American Society of Engineering Education-Southeast Section Conference, 2013

[33] V. Todakar, Omer Alkelany "Data Archival to SD Card Via Hardware Description Language," IEEE Embedded Systems Letters, Vol. 3, No. 4, pp. 105-108, December, DOI: 10.1109/LES.2011.2168804, 2011.

[34] Omer Alkelany M. Abdallah, A. Alouani; "A Low-Cost Stand-Alone Multichannel Data Acquisition, Monitoring, and Archival System With On-Chip Signal Processing," IEEE Transaction on Instrumentation and Measurement, vol. 60 (8), pp. 2813-2827, DOI: 10.1109/tim.2009.2036402, 2011.

[35] Omer Alkelany Ali Alouani, Mohammed Abdallah; "Stand-alone Portable Digital Body Sound Data Acquisition Device." International Journal of Embedded Systems, Vol. 4, Nos.3/4, DOI: 10.1504/IJES.2010.039032, 2010.

[36] M. Abdallah, O. Alkelany, "A Multi-channel Frequency Detection and Monitoring System," In proceedings of The 23 rd IEEE International SOC Conference(SOCC'10), 2010.

[37] M. Abdallah, O. Alkelany; "Multi-channel Multiplexed Stand-alone Audio Data Acquisition System: The effect of settling time on acquisition accuracy." In proceedings of The ISCA 22nd International Conference on Computer Applications Industry and Engineering, 2009.

[38] M. Abdallah, O. Alkelany, A. Alouani; "A Novel Dynamic Scheduling for Simultaneous Multi-channel DAQ." In proceedings of The International Conference on High Performance Computing, Networking and Communication Systems (HPCNCS), 2009.

[39] M. Abdallah, O. Alkelany, A. Alouani; "Multi-channel Multiplexed Stand-alone Audio Data Acquisition System." In proceedings of The International Conference on High Performance Computing, Networking and Communication Systems (HPCNCS), 2009.

[40] M. Abdallah, O. Alkelany; "Simultaneous Multi-channel Data Acquisition and Storing System." In proceedings of The

International Conference on Computing, Engineering and Information Systems (ICC), 2009.

[41] M. Abdallah, O. Alkelany "A Survey on Data Acquisition systems DAQ." In proceedings of The International Conference on Computing, Engineering and Information Systems (ICC),2009.

[42] M. Abdallah, O. Alkelany, A. Alouani; "A Conceptual Design of a Compact Multi-channel real-time Analog Signal Acquisition and Processing System." In proceedings of The IEEE41st Southeast Symposium on System Theory (SSST), 2009.

[43] M. Abdallah, O. Alkelany, A. Alouani; "An Efficient Hardware Reconfigurable Multichannel Audio Data Acquisition, Storing and Monitoring System." In proceedings of The IEEE International Conference on Consumer Electronics (ICCE), 2008.

[44] M. Abdallah, O. Alkelany; "System-On-Chip Technology-based On-the-fly Audio Data Acquisition, Monitoring and Displaying System using FPGA." In proceedings of The International System on Chip conference, Korea, 2008.

[45] M. Abdallah, O. Alkelany, A. Alouani, "Stand-alone Data Acquisition System with Graphical Monitoring of Analog Data in Embedded System Applications." In proceedings of The IEEE Southeast Conference, pp. 252-256, 2008.

[46] O. Alkelany A. Alouani, M. Abdallah; "A Novel Design and Development of a Single Channel Integrated Digital Body Sound Data Acquisition Device." In proceedings of The International Conference on Biomedical Electronics and Devices, Portugal, vol. 2, pp. 244-249, 2008.

[47] Hawtrey, Kim. "Using Experiential Learning Techniques". Journal of Economic Education, volume 38, issue. 2, pp. 143-152, 2007.

[48] Felicia, Patrick. Handbook of Research on Improving Learning and Motivation. ISBN 978-1609604967, 2011.

[49] MIT Sloan Management, "Action Learning - How does it work in practice?", Why back mission site, 2016.

[50] -, The Power of Experiential Learning, 4-H Cooperative Curriculum System. 2016.

[51] -, The Out of Eden Walk: An Experiential Learning Journey from the Virtual to the Real, http://www.edutopia.org/blog/out-of-eden-experiential-learning-homa-tavangar, January 3, 2014. Retrieved 2020.

[52] MIT Sloan, Action Learning - How does it work in practice? http://mitsloan.mit.edu/mba/program-components/hands-on-learning/, retrieved 2021.

[53] -, The Power of Experiential Learning, 4-H Cooperative Curriculum System, http://njaes.rutgers.edu/learnbydoing/ . retrieved 2020.

[54] Beard, Colin (2010). The Experiential Learning Toolkit: Blending Practice with Concepts. p. 20. ISBN 9780749459345, https://books.google.com/books?id=DAhYlaZhRI8C&pg=PA20 retrieved 2020.

[55] Itin, C. M., Reasserting the Philosophy of Experiential Education as a Vehicle for Change in the 21st Century. The Journal of Physical Education 22(2), p. 91-98, 1999.

[56] Breunig, Mary C., "Teaching Dewey's Experience and Education Experientially". In Stremba, Bob; Bisson, Christian A. (eds.).

Teaching Adventure Education Theory: Best Practices. p. 122. ISBN 9780736071260, 2009.

[57] Nicomachean Ethics, Aristotle, Book 2, D.P. Chase translation ,1911.

[58] Dixon, Nancy M.; Adams, Doris E.; Cullins, Richard. "Learning Style". Assessment, Development, and Measurement. p. 41. ISBN 9781562860493, 1997.

[59] Kolb, D., Experiential Learning: experience as the source of learning and development. Englewood Cliffs, NJ: Prentice Hall. p. 21, 1984.

[60] Kolb, D., Experiential Learning, http://www2.le.ac.uk/departments/gradschool/training/resources/teaching/theories/kolb, 2012.

[61] Merriam, S. B., Caffarella, R. S., & Baumgartner, L. M., Learning in adulthood: a comprehensive guide. San Francisco: John Wiley & Sons, Inc., 2007.

[62] Moon, J., A Handbook of Reflective and Experiential Learning: Theory and Practice. London: Routledge Falmer. p. 126., 2004.

[63] Kolb, D,. Experiential Learning as the Science of Learning and Development. Englewood Cliffs, NJ: Prentice Hall.1984.

[64] Chickering, A., Experience and Learning. New York: Change Magazine Press. p. 63., 1977.

[65] Hutton, M., Learning from action: a conceptual framework, in S. Warner Weil and M. McGill (eds) Making Sense of Experiential Learning. Milton Keynes: SRHE/Open University Press. pp. 50–9, p. 51, 1980.

[66] J. O. Hamblen, H. L. Owen, S. Yalamanchili and Binh Dao, "An undergraduate computer engineering rapid systems prototyping design laboratory," in IEEE Transactions on Education, vol. 42, no. 1, pp. 8-14, doi: 10.1109/13.746325, 1999.

[67] C. Zhou, H. Li and Y. Bian, "Identifying the Optimal 3D Display Technology for Hands-On Virtual Experiential Learning: A Comparison Study," in IEEE Access, vol. 8, pp. 73791-73803, doi: 10.1109/ACCESS.2020.2988678, 2020.

[68] E. Rho, K. Chan, E. J. Varoy and N. Giacaman, "An Experiential Learning Approach to Learning Manual Communication Through a Virtual Reality Environment," in IEEE Transactions on Learning Technologies, vol. 13, no. 3, pp. 477-490, 1, doi: 10.1109/TLT.2020.2988523, 2020.

[69] Hajshir Mohammadi, "Incorporating Experiential Learning in Engineering Courses," in IEEE Communications Magazine, vol. 55, no. 11, pp. 166-169, doi: 10.1109/MCOM.2017.1700373, 2017.

[70] Altera De2-70, https://www.terasic.com.tw/cgi-bin/page/archive.pl?Language=English&No=226, accessed 2023

[71] Terasic, High speed ADC board, https://www.terasic.com.tw/cgi-bin/page/archive.pl?Language=English&CategoryNo=67&No=278#contents accessed 2023.